

PRODUCT DATASHEET

High luminous efficiency, five years warranty HYD-409-70W 6500K



Application

- Stadium
- Park
- Large area workplace
- Packing lots
- Gymnasiums

Benefits

- · Flicker free
- Lighting coverage area is wide
- Protection against water and dust, IP65
- Adjustable support, any Angle, flexible adjustment of light direction

Features

- Warranty 5 years
- Highly transparent glass mask
- Easy and quick installation
- Thick aluminum lamp body, corrosion resistance, good heat dissipation, long service life





Electrical Data

Nominal wattage (W)	70W
Nominal Voltage (V)	220-240 V
Mains Frequency (Hz)	50/60 Hz
Nominal Current (mA)	322
Power Factor	0.9
Operating mode	DOB

Photometrical data

Luminous flux ±10% (lm)	7636 lm		
Luminous efficacy	108 lm/w		
Color temperature	6500K		
Light color (designation)	Cold White		
Color rendering index Ra	≥80		
Standard deviation of color matching	≤5 SDCM		
Luminous intensity/cd	2971		
Flickering	Flicker free		
Beam angle	108 °		






6500K

Dimensions & Weight

Diameter (mm)	245*187
Height (mm)	26
Product weight (g)	1026



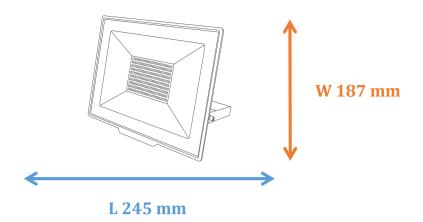

Material & Colors

Product color	Black housing / White Frame		
Housing color	Black		
Body material	Aluminum		
Cover material	Glass		
Mercury content	0.0 mg		

Application & Mounting

-10-45 °C		
-25-60 °C		
Screwless terminal		
IP65		
No		
Put/Suspension		
Underground/Wall/Ceiling		
Indoor/Outdoor		
No		
Not replaceable		
Yes		

Certificates & Lifespan


Life (h)	50,000		
Certificates	CB CE LVD EMC		
Standards	ISO9001:2015		




Logistical Data

Product code	Dimensions	Pcs/	G.W.	Volume
	(L*W*H)	carton	kg	CBM
HYD-409-70W	•••			•••


Installation Method



Fix the lamp and the solar panel with stainless steel screws.



Make sure to connect the plug firmly.

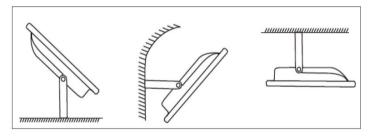

Install the LED flood lights in the ground, wall, and ceiling

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.