
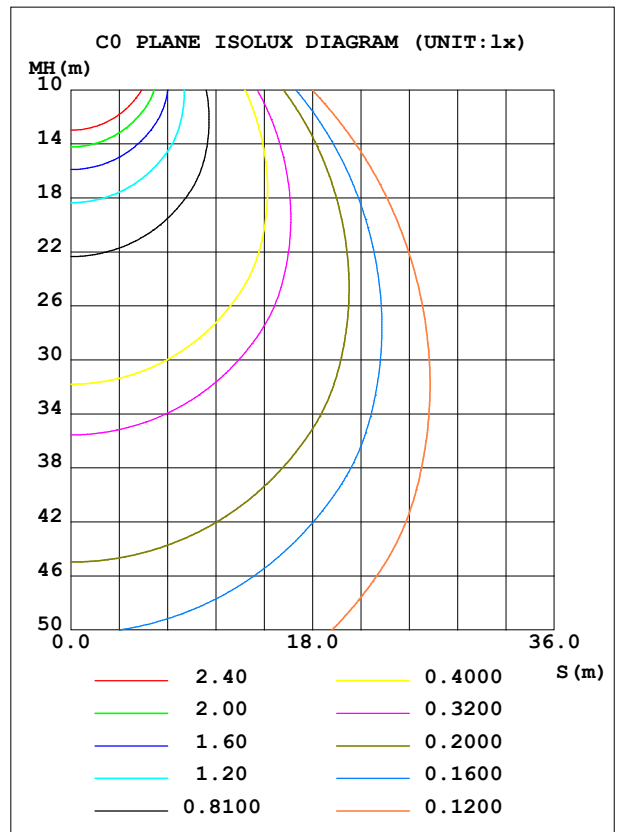


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.35V I:0.0799A P:9.1480W PF:0.5196 Freq:50.00Hz Lamp Flux:918.629x1 lm		
NAME:	TYPE: 227	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	227S	Imax (cd)	399.7	S/MH (C0/180)	1.24
NOMINAL POWER (W)	9	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	918.63	η UP, DN (C0-180)	0.5,49.2
NOMINAL FLUX (lm)	918.629	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.5,49.8
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	219.5	η down (%)	99.0	CIBSE SHR MAX	1.35

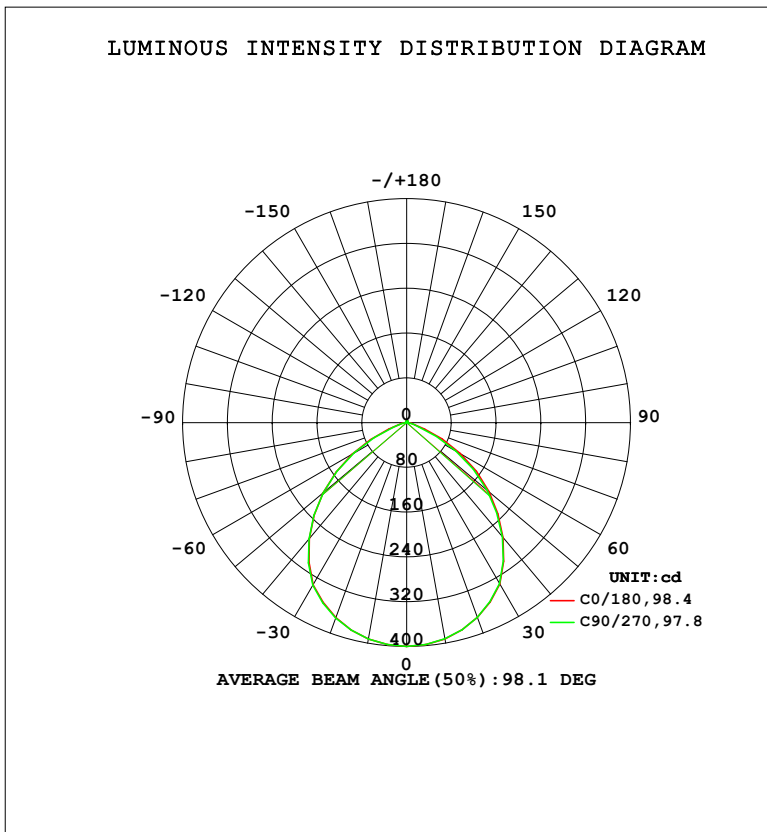

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-16

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	392.3	392.3	392.2	392.3	392.6	392.6	392.6	392.6	0- 10	37.81	37.81	4.12,4.12
20	370.1	370.3	369.8	370.2	370.6	371.0	371.0	371.1	10- 20	108.2	146.0	15.9,15.9
30	333.0	333.4	332.0	333.6	334.6	336.0	335.5	336.0	20- 30	163.2	309.2	33.7,33.7
40	268.2	279.3	266.1	280.2	270.5	284.4	271.8	284.3	30- 40	191.5	500.7	54.5,54.5
50	192.0	194.3	187.4	195.8	194.7	200.7	194.6	200.1	40- 50	181.8	682.5	74.3,74.3
60	110.7	106.3	101.5	107.9	112.5	112.3	108.4	111.6	50- 60	137.0	819.5	89.2,89.2
70	34.21	31.94	22.97	32.72	34.63	34.81	26.20	34.82	60- 70	68.35	887.9	96.7,96.7
80	8.998	7.418	6.605	7.405	8.995	7.806	7.190	7.900	70- 80	18.00	905.9	98.6,98.6
90	0.2661	0.2524	0.2418	0.2607	0.3215	0.3246	0.3747	0.3092	80- 90	3.549	909.4	99,99
100	0.4637	0.4561	0.4404	0.4541	0.6192	0.6310	0.6705	0.6305	90-100	0.4406	909.9	99,99
110	0.8622	0.8403	0.8506	0.8356	1.042	1.051	1.057	1.049	100-110	0.7811	910.7	99.1,99.1
120	1.320	1.273	1.279	1.254	1.518	1.442	1.498	1.461	110-120	1.156	911.8	99.3,99.3
130	1.731	1.717	1.696	1.702	1.905	1.922	1.914	1.927	120-130	1.426	913.2	99.4,99.4
140	2.147	2.035	2.064	2.029	2.344	2.210	2.324	2.218	130-140	1.530	914.8	99.6,99.6
150	2.403	2.402	2.505	2.399	2.601	2.547	2.584	2.563	140-150	1.453	916.2	99.7,99.7
160	2.790	2.810	2.843	2.793	2.934	2.907	3.031	2.927	150-160	1.238	917.5	99.9,99.9
170	3.159	3.176	3.163	3.150	3.279	3.255	3.266	3.254	160-170	0.8601	918.3	100,100
180	3.386	3.399	3.369	3.387	3.397	3.411	3.381	3.399	170-180	0.3150	918.6	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 595.22 lm

%lum = 64.8%

%lamp = 64.8%

Conical surface Flux(130deg): 862.74 lm

%lum = 93.9%


%lamp = 93.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-16

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.35V I:0.0799A P:9.1480W PF:0.5196 Freq:50.00Hz Lamp Flux:918.629x1 lm		
NAME:	TYPE: 227	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

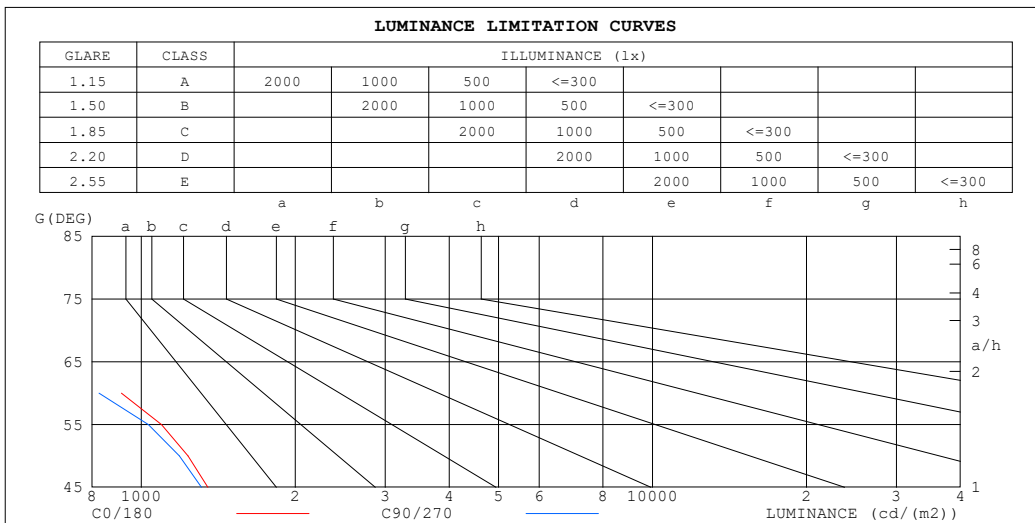

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	169	77
80	214	155
75	248	204
70	413	273
65	687	565
60	914	827
55	1095	1032
50	1234	1187
45	1349	1312


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-16

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.35V I:0.0799A P:9.1480W PF:0.5196 Freq:50.00Hz Lamp Flux:918.629x1 lm		
NAME:	TYPE: 227	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.07	1.03	.00	1.04	1.01	.98	.00	.97	.95	.96	.94	.92	.92	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.89	.85	.81	.86	.82	.79	.83	.80	.77	.75
3.0	.85	.77	.72	.83	.76	.71	.80	.74	.70	.77	.72	.68	.75	.71	.67	.65
4.0	.76	.68	.62	.74	.67	.61	.72	.66	.61	.70	.64	.60	.67	.63	.59	.57
5.0	.68	.60	.54	.67	.59	.54	.65	.58	.53	.63	.57	.52	.61	.56	.52	.50
6.0	.62	.54	.48	.61	.53	.47	.59	.52	.47	.57	.51	.46	.56	.50	.46	.44
7.0	.56	.48	.42	.55	.48	.42	.54	.47	.42	.52	.46	.42	.51	.45	.41	.39
8.0	.52	.44	.38	.51	.43	.38	.49	.43	.38	.48	.42	.37	.47	.41	.37	.35
9.0	.47	.40	.34	.47	.39	.34	.46	.39	.34	.45	.38	.34	.43	.38	.34	.32
10.0	.44	.36	.31	.43	.36	.31	.42	.36	.31	.41	.35	.31	.40	.35	.31	.29

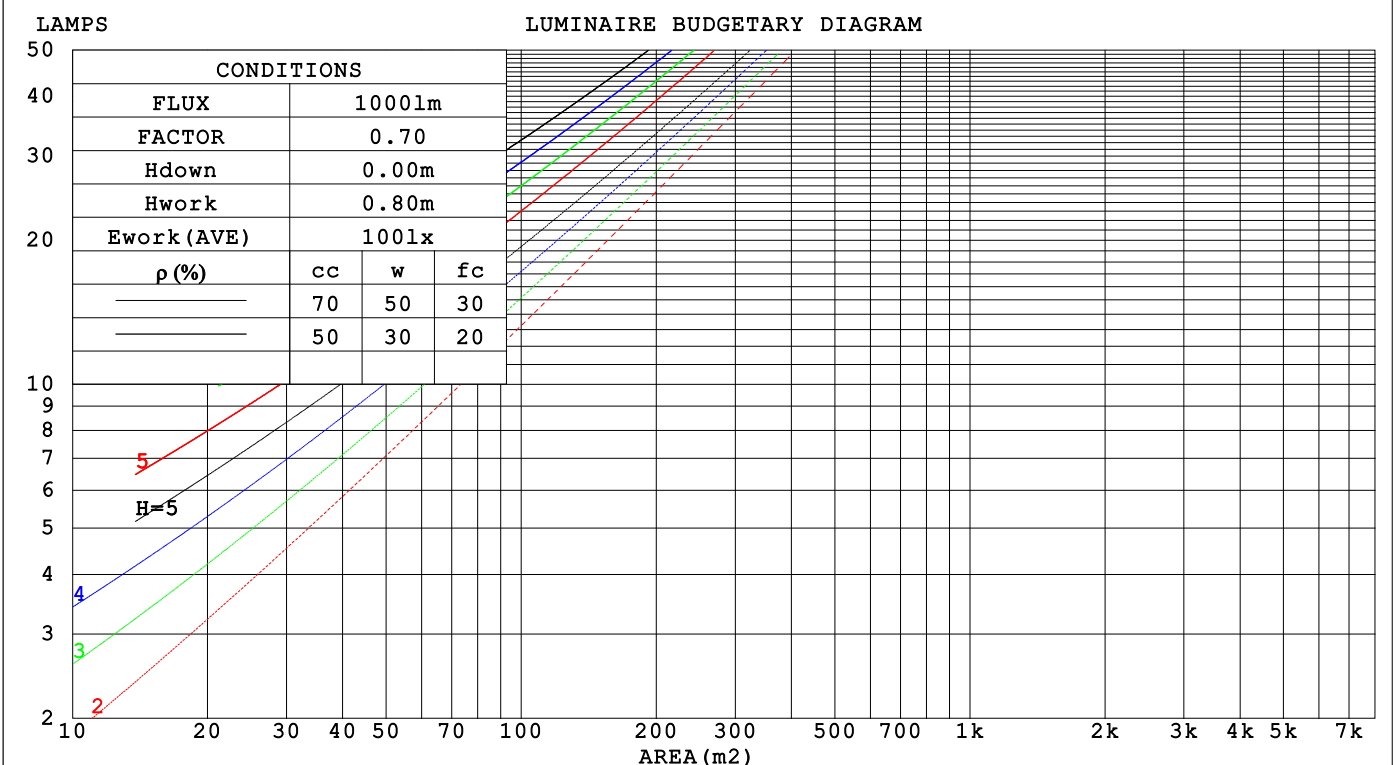

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-16

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.35V I:0.0799A P:9.1480W PF:0.5196 Freq:50.00Hz								
Lamp Flux:918.629x1 lm								
NAME:			TYPE: 227			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.: 156.5mm			Shielding Angle:		

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.253	.144	.046	.246	.140	.045	.233	.133	.043	.220	.127	.041	.209	.121	.039	
2.0	.247	.135	.042	.241	.133	.041	.229	.127	.040	.218	.122	.038	.208	.118	.037	
3.0	.235	.125	.037	.229	.123	.037	.219	.119	.036	.209	.115	.035	.200	.111	.034	
4.0	.221	.115	.034	.217	.113	.033	.207	.110	.033	.199	.107	.032	.191	.104	.032	
5.0	.208	.106	.031	.204	.105	.030	.196	.102	.030	.188	.099	.029	.181	.097	.029	
6.0	.196	.098	.028	.192	.097	.028	.184	.094	.027	.177	.092	.027	.171	.090	.027	
7.0	.184	.091	.026	.180	.090	.026	.174	.088	.025	.168	.086	.025	.162	.084	.025	
8.0	.173	.085	.024	.170	.084	.024	.164	.082	.023	.159	.080	.023	.153	.079	.023	
9.0	.164	.079	.022	.161	.078	.022	.155	.077	.022	.150	.075	.022	.146	.074	.021	
10.0	.155	.074	.021	.152	.074	.021	.147	.072	.020	.143	.071	.020	.138	.070	.020	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.116	.116	.116	.066	.066	.066	.021	.021	.021	
1.0	.184	.164	.147	.158	.141	.126	.108	.097	.087	.062	.056	.051	.020	.018	.016	
2.0	.174	.140	.111	.149	.120	.096	.102	.083	.067	.059	.048	.039	.019	.016	.013	
3.0	.166	.122	.087	.142	.105	.075	.097	.073	.053	.056	.043	.031	.018	.014	.010	
4.0	.158	.108	.070	.135	.093	.061	.093	.065	.043	.054	.038	.025	.017	.012	.008	
5.0	.151	.098	.058	.129	.084	.051	.089	.059	.036	.052	.035	.021	.017	.011	.007	
6.0	.144	.089	.050	.124	.077	.043	.085	.054	.031	.050	.032	.018	.016	.010	.006	
7.0	.138	.082	.043	.118	.071	.038	.082	.050	.027	.048	.029	.016	.015	.010	.005	
8.0	.132	.076	.038	.113	.066	.033	.078	.046	.024	.046	.027	.014	.015	.009	.005	
9.0	.126	.071	.034	.109	.062	.030	.075	.044	.021	.044	.026	.013	.014	.008	.004	
10.0	.121	.067	.031	.104	.058	.027	.072	.041	.019	.042	.024	.012	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-16

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.35V I:0.0799A P:9.1480W PF:0.5196 Freq:50.00Hz										
Lamp Flux:918.629x1 lm										
NAME:			TYPE: 227				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.: 156.5mm				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.1	14.5	13.4	14.7	14.9	12.8	14.2	13.1	14.4	14.6
3H	13.4	14.6	13.7	14.9	15.1	12.9	14.1	13.2	14.3	14.6
4H	13.3	14.5	13.7	14.8	15.1	12.8	14.0	13.1	14.3	14.5
6H	13.3	14.4	13.6	14.7	15.0	12.8	13.9	13.1	14.1	14.4
8H	13.3	14.3	13.6	14.6	14.9	12.7	13.8	13.1	14.1	14.4
12H	13.2	14.3	13.6	14.6	14.9	12.7	13.7	13.0	14.0	14.3
4H 2H	13.3	14.5	13.6	14.7	15.0	13.0	14.2	13.3	14.4	14.7
3H	13.6	14.6	13.9	14.9	15.2	13.1	14.1	13.5	14.4	14.7
4H	13.6	14.5	14.0	14.8	15.2	13.1	14.0	13.5	14.3	14.7
6H	13.6	14.4	14.0	14.8	15.1	13.1	13.9	13.5	14.2	14.6
8H	13.6	14.3	14.0	14.7	15.1	13.0	13.8	13.4	14.2	14.6
12H	13.5	14.2	14.0	14.6	15.0	13.0	13.7	13.4	14.1	14.5
8H 4H	13.5	14.3	13.9	14.6	15.0	13.0	13.8	13.4	14.2	14.6
6H	13.5	14.1	14.0	14.6	15.0	13.0	13.6	13.5	14.1	14.5
8H	13.5	14.1	14.0	14.5	15.0	13.0	13.5	13.5	14.0	14.4
12H	13.5	14.0	14.0	14.4	14.9	13.0	13.4	13.4	13.9	14.4
12H 4H	13.5	14.1	13.9	14.5	15.0	13.0	13.7	13.4	14.1	14.5
6H	13.5	14.0	14.0	14.5	14.9	13.0	13.5	13.5	14.0	14.4
8H	13.5	13.9	14.0	14.4	14.9	13.0	13.4	13.4	13.9	14.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.5 / - 0.7					+ 0.7 / - 0.9				
1.5H	+ 0.3 / - 0.6					+ 0.4 / - 0.7				
2.0H	+ 1.1 / - 1.4					+ 1.2 / - 1.9				

CIE Pub.117, 918.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.3)
 Area: 0.245 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-16

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.35V I:0.0799A P:9.1480W PF:0.5196 Freq:50.00Hz Lamp Flux:918.629x1 lm		
NAME:	TYPE: 227	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	52	46	62	52	45	61	51	45	39
0.80	73	63	56	72	62	56	70	61	56	49
1.00	82	72	66	81	71	65	78	72	65	58
1.25	89	80	74	87	79	73	85	77	72	66
1.50	93	85	79	92	84	78	89	82	77	71
2.00	99	92	87	98	91	86	94	89	84	77
2.50	102	96	91	101	95	90	97	92	88	80
3.00	105	100	95	103	98	94	99	95	92	84
4.00	109	104	100	106	102	99	102	99	96	87
5.00	111	107	103	108	105	102	104	101	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-16

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.35V I:0.0799A P:9.1480W PF:0.5196 Freq:50.00Hz Lamp Flux:918.629x1 lm		
NAME:	TYPE: 227	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

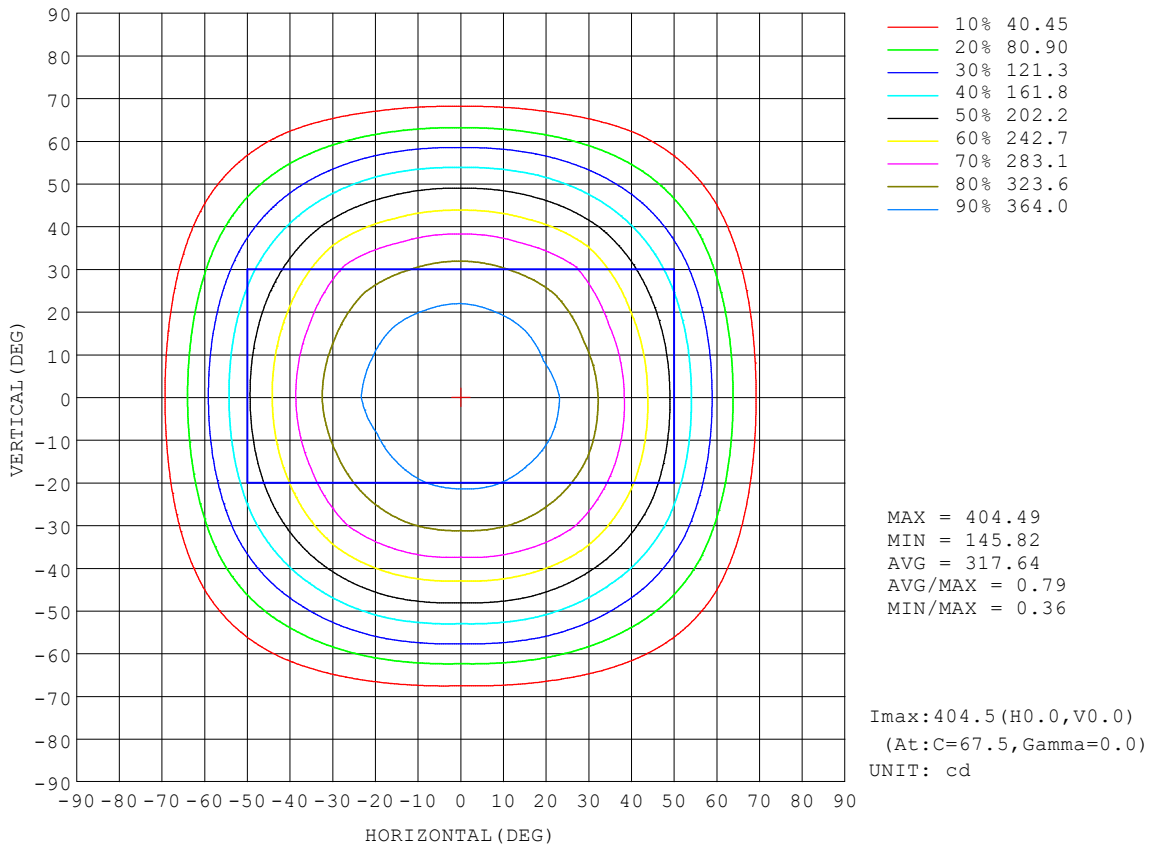


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-16

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.35V I:0.0799A P:9.1480W PF:0.5196 Freq:50.00Hz Lamp Flux:918.629x1 lm		
NAME:	TYPE: 227	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

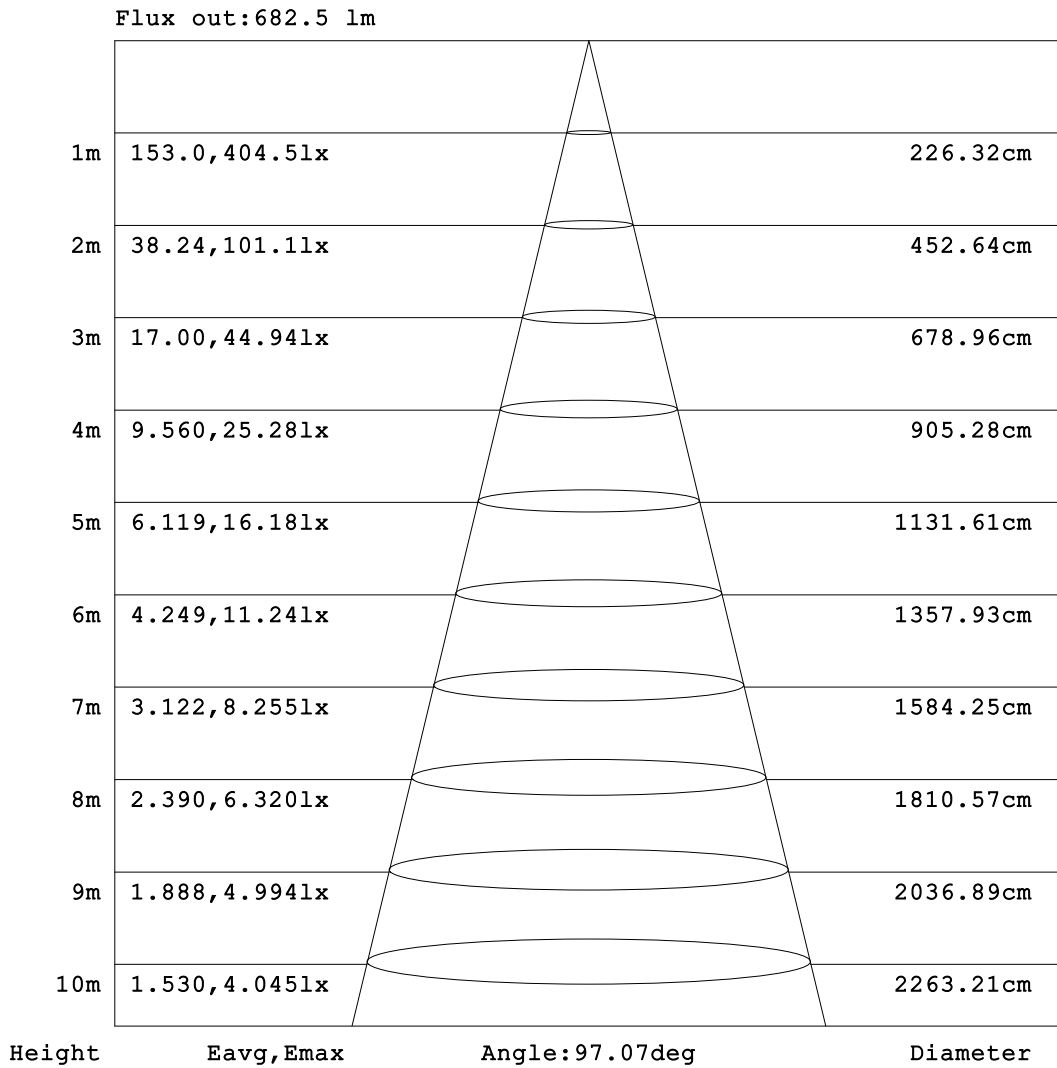


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-16

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.35V I:0.0799A P:9.1480W PF:0.5196 Freq:50.00Hz Lamp Flux:918.629x1 lm		
NAME:	TYPE: 227	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

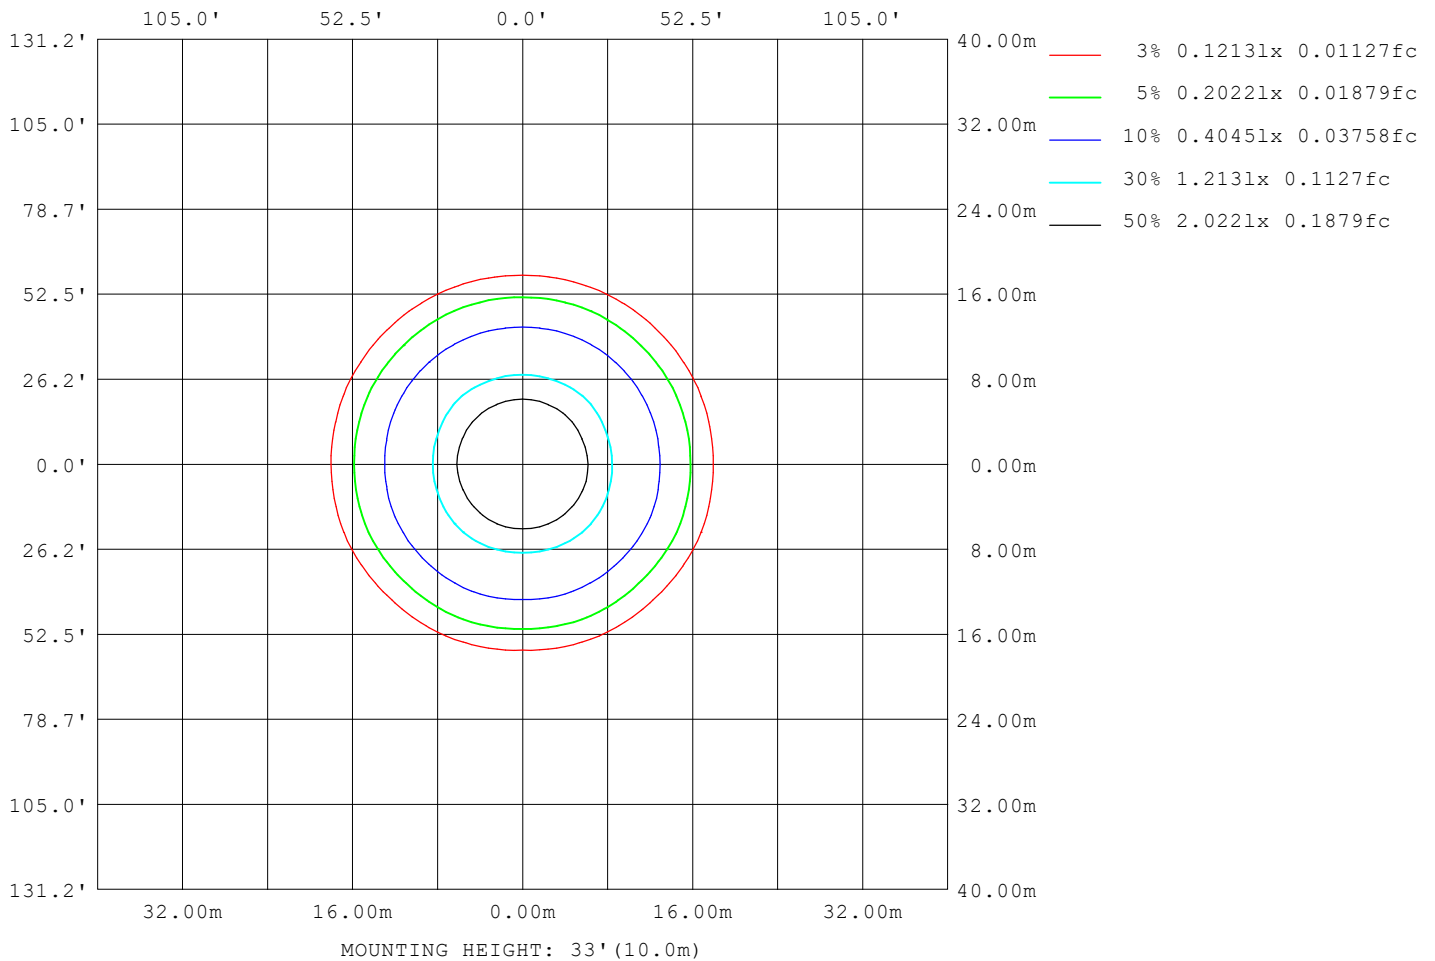

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-16

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.35V I:0.0799A P:9.1480W PF:0.5196 Freq:50.00Hz Lamp Flux:918.629x1 lm		
NAME:	TYPE: 227	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	686
L_0~180 (75) av	246
L_0~180 (85) av	168
L_90~270 (65) av	596
L_90~270 (75) av	209
L_90~270 (85) av	89
L_45 (65) av	655
L_45 (75) av	227
L_45 (85) av	104

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-16

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

Planar Illuminance Curve

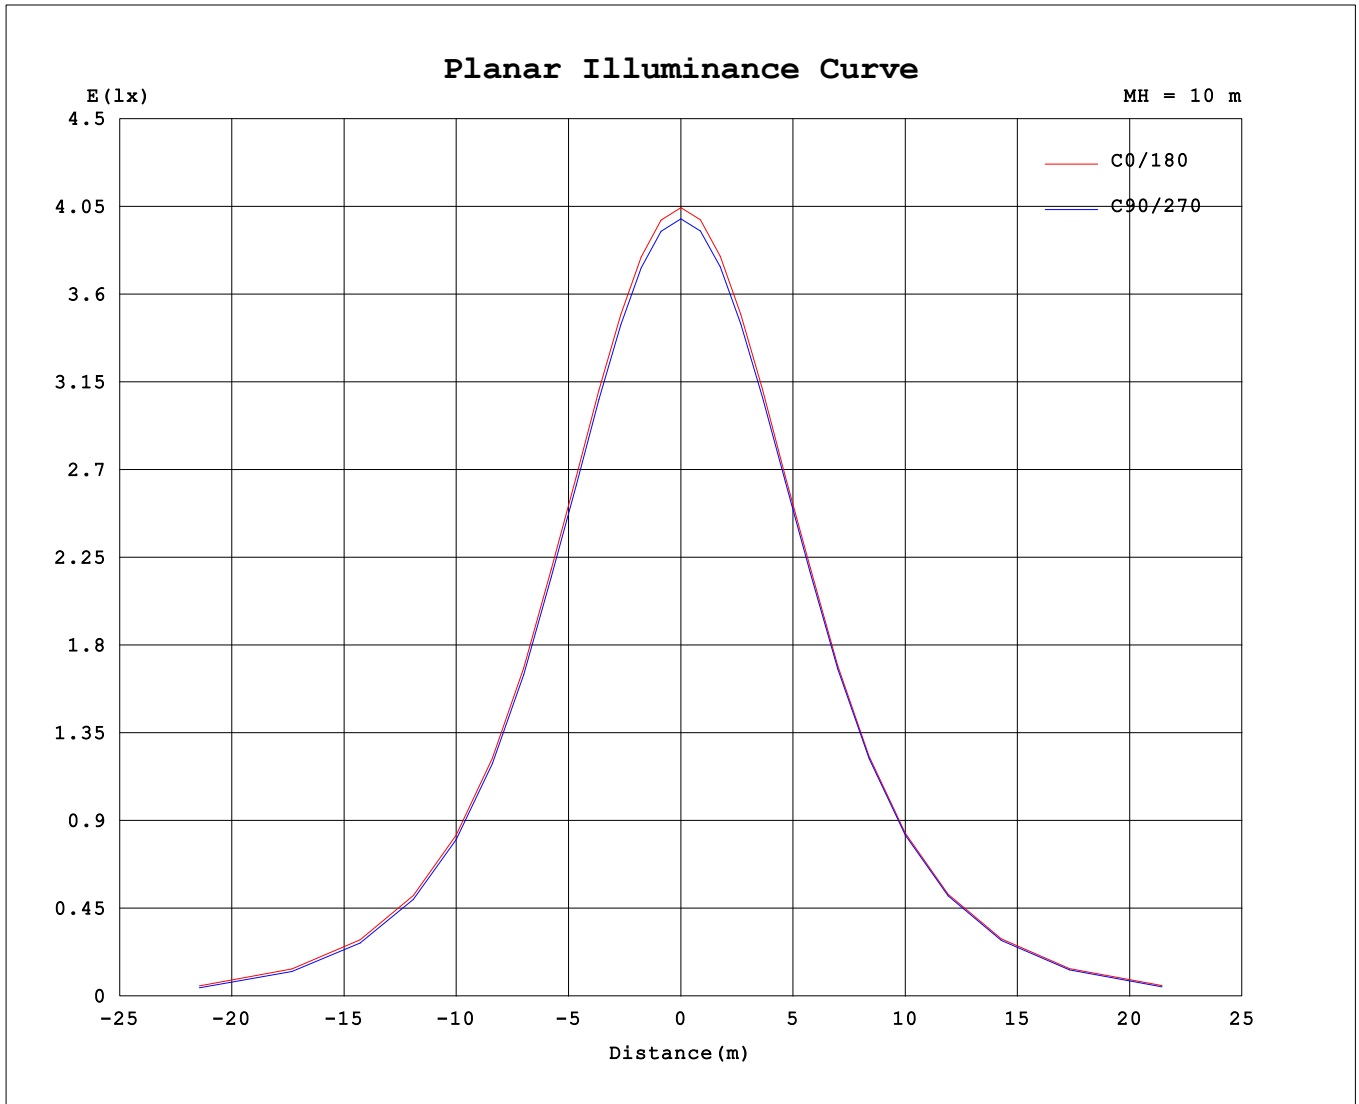

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-16

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.35V I:0.0799A P:9.1480W PF:0.5196 Freq:50.00Hz Lamp Flux:918.629x1 lm		
NAME:	TYPE: 227	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400			
5	398	398	398	398	398	398	398	398	398	398	398	398	398	398	398	398			
10	392	393	392	392	392	392	392	393	393	392	393	392	393	392	393	392			
15	383	384	383	383	383	383	383	383	383	383	384	383	384	383	384	383			
20	370	371	370	371	370	371	370	371	371	370	371	371	371	371	371	370			
25	354	355	354	355	353	355	354	355	354	354	356	354	356	354	356	354			
30	333	335	333	334	332	334	334	335	335	334	336	334	335	334	336	334			
35	303	309	309	306	301	307	310	308	305	307	313	307	306	308	313	307			
40	268	274	279	271	266	272	280	274	270	273	284	274	272	274	284	273			
45	231	237	238	233	228	234	239	238	234	237	244	236	235	237	244	236			
50	192	198	194	193	187	194	196	199	195	199	201	197	195	197	200	197			
55	152	156	150	150	145	152	152	158	154	158	156	155	152	156	156	157			
60	111	113	106	106	102	107	108	114	113	115	112	111	108	110	112	114			
65	70.3	70.8	65.1	62.3	58.7	63.2	66.3	72.0	71.8	72.3	70.2	66.9	64.8	66.4	69.6	71.8			
70	34.2	35.5	31.9	26.2	23.0	26.9	32.7	35.7	34.6	36.0	34.8	28.7	26.2	28.6	34.8	35.8			
75	15.6	15.2	14.0	13.4	12.9	13.4	14.1	15.3	15.7	15.4	14.7	13.9	13.6	13.9	14.8	15.5			
80	9.00	8.48	7.42	7.00	6.61	7.00	7.41	8.50	9.00	8.53	7.81	7.26	7.19	7.31	7.90	8.70			
85	3.57	2.90	2.02	1.86	1.65	1.86	2.01	2.88	3.59	2.86	2.37	2.04	2.15	2.07	2.46	3.04			
90	0.27	0.28	0.25	0.25	0.24	0.25	0.26	0.28	0.32	0.32	0.32	0.33	0.37	0.30	0.31	0.34			
95	0.31	0.37	0.31	0.39	0.31	0.38	0.31	0.38	0.45	0.39	0.46	0.40	0.53	0.39	0.46	0.39			
100	0.46	0.53	0.46	0.52	0.44	0.51	0.45	0.52	0.62	0.56	0.63	0.57	0.67	0.56	0.63	0.56			
105	0.65	0.71	0.64	0.70	0.63	0.70	0.64	0.70	0.81	0.77	0.83	0.75	0.86	0.76	0.84	0.76			
110	0.86	0.92	0.84	0.90	0.85	0.90	0.84	0.91	1.04	0.99	1.05	0.98	1.06	1.00	1.05	0.99			
115	1.09	1.14	1.04	1.11	1.05	1.10	1.04	1.13	1.29	1.21	1.27	1.22	1.27	1.20	1.27	1.22			
120	1.32	1.37	1.27	1.34	1.28	1.33	1.25	1.35	1.52	1.44	1.44	1.45	1.50	1.44	1.46	1.45			
125	1.55	1.56	1.46	1.55	1.49	1.54	1.46	1.54	1.75	1.60	1.65	1.65	1.73	1.65	1.67	1.65			
130	1.73	1.77	1.72	1.74	1.70	1.72	1.70	1.74	1.90	1.81	1.92	1.78	1.91	1.79	1.93	1.86			
135	1.90	1.98	1.86	1.93	1.91	1.91	1.84	1.96	2.11	2.06	2.04	1.97	2.14	1.98	2.05	2.04			
140	2.15	2.14	2.04	2.11	2.06	2.10	2.03	2.13	2.34	2.18	2.21	2.15	2.32	2.17	2.22	2.23			
145	2.24	2.29	2.21	2.28	2.31	2.28	2.19	2.27	2.43	2.33	2.37	2.30	2.42	2.32	2.37	2.34			
150	2.40	2.47	2.40	2.49	2.50	2.46	2.40	2.50	2.60	2.50	2.55	2.49	2.58	2.50	2.56	2.50			
155	2.59	2.66	2.61	2.71	2.65	2.67	2.59	2.67	2.76	2.69	2.73	2.67	2.77	2.69	2.74	2.69			
160	2.79	2.85	2.81	2.92	2.84	2.88	2.79	2.83	2.93	2.85	2.91	2.85	3.03	2.87	2.93	2.86			
165	2.99	3.06	3.00	3.10	3.02	3.06	2.98	3.03	3.11	3.03	3.09	3.03	3.21	3.06	3.10	3.03			
170	3.16	3.24	3.18	3.25	3.16	3.21	3.15	3.22	3.28	3.20	3.26	3.17	3.27	3.21	3.25	3.19			
175	3.29	3.39	3.33	3.39	3.28	3.35	3.30	3.35	3.40	3.34	3.38	3.29	3.37	3.32	3.39	3.31			
180	3.39	3.40	3.40	3.42	3.37	3.38	3.39	3.39	3.40	3.39	3.41	3.37	3.38	3.38	3.40	3.37			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-16

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks: