
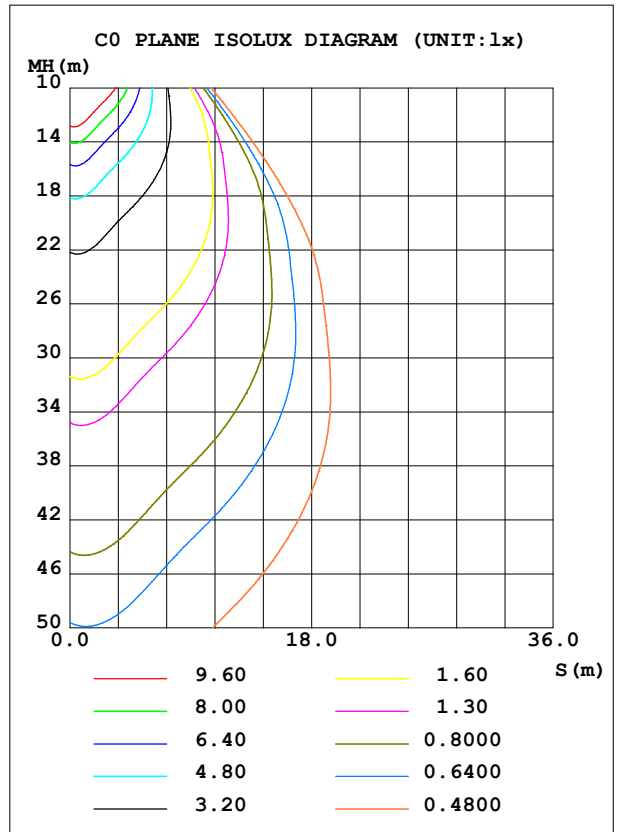


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:220.37V I:0.1130A P:13.745W PF:0.5519 Freq:50.00Hz Lamp Flux:1572.14x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 81mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	308	Imax (cd)	1552	S/MH (C0/180)	0.88
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.90
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1572.1	$\eta$ UP, DN (C0-180)	0.5, 48.8
NOMINAL FLUX (lm)	1572.14	CIE CLASS	DIRECT	$\eta$ UP, DN (C180-360)	0.6, 50.2
LAMPS INSIDE	1	$\eta$ up (%)	1.1	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	219.5	$\eta$ down (%)	98.9	CIBSE SHR MAX	1.00

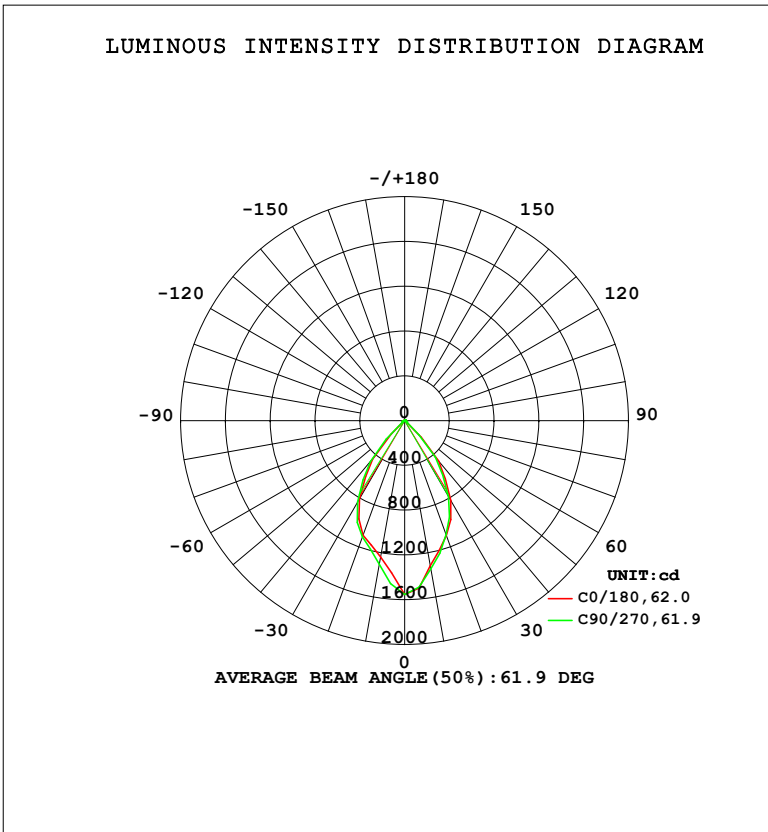

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-11-10

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.401m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	1317	1356	1347	1295	1237	1251	1304	1323	0- 10	134.7	134.7	8.57,8.57
20	1094	1104	1086	1084	1091	1118	1107	1102	10- 20	337.2	471.9	30,30
30	823.1	808.0	785.7	782.1	806.0	844.4	840.9	843.2	20- 30	445.2	917.1	58.3,58.3
40	471.2	453.6	428.5	426.1	448.6	469.3	478.4	483.6	30- 40	393.6	1311	83.4,83.4
50	40.55	41.52	39.37	37.07	40.78	42.76	43.79	41.85	40- 50	171.6	1482	94.3,94.3
60	23.74	20.93	21.14	22.01	21.86	22.69	24.59	25.73	50- 60	25.50	1508	95.9,95.9
70	25.38	22.25	22.21	22.83	23.49	24.46	24.47	26.56	60- 70	23.13	1531	97.4,97.4
80	13.83	12.23	10.66	11.79	12.60	13.29	13.55	14.48	70- 80	19.63	1551	98.6,98.6
90	0.0966	0.0902	0.0910	0.0973	0.1248	0.1141	0.1092	0.1154	80- 90	4.878	1555	98.9,98.9
100	0.1955	0.2036	0.2170	0.2302	0.3865	0.3605	0.3266	0.3281	90-100	0.1811	1556	99,99
110	0.7353	0.7911	0.8262	0.8243	1.093	1.045	0.9912	0.9839	100-110	0.5966	1556	99,99
120	1.732	1.817	1.858	1.855	2.228	2.167	2.096	2.082	110-120	1.404	1558	99.1,99.1
130	3.032	3.124	3.192	3.165	3.623	3.548	3.504	3.448	120-130	2.363	1560	99.2,99.2
140	4.380	4.450	4.563	4.512	5.042	4.928	4.898	4.874	130-140	3.104	1563	99.4,99.4
150	5.562	5.621	5.729	5.660	6.139	6.025	6.020	6.074	140-150	3.317	1566	99.6,99.6
160	6.458	6.533	6.658	6.527	6.929	6.787	6.872	6.893	150-160	2.894	1569	99.8,99.8
170	7.598	7.685	7.757	7.680	7.950	7.795	7.856	7.907	160-170	2.038	1571	100,100
180	8.513	8.544	8.489	8.573	8.561	8.580	8.501	8.597	170-180	0.7770	1572	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1433.2 lm

%lum = 91.2%

%lamp = 91.2%

Conical surface Flux(130deg): 1519 lm

%lum = 96.6%


%lamp = 96.6%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-11-10

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:220.37V I:0.1130A P:13.745W PF:0.5519 Freq:50.00Hz Lamp Flux:1572.14x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 81mm	Shielding Angle:

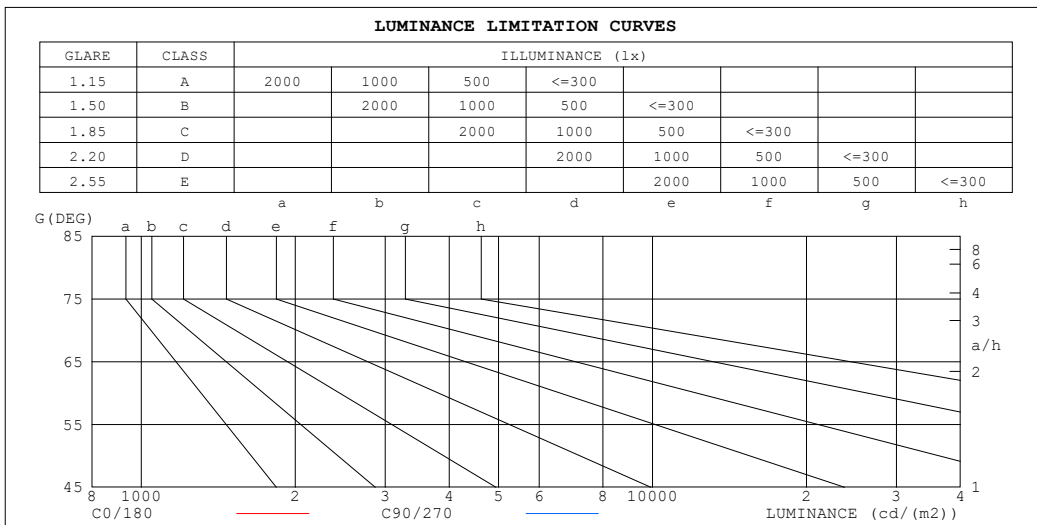

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	579	27
80	636	482
75	619	499
70	593	510
65	449	409
60	379	332
55	363	304
50	504	481
45	2378	2034


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-11-10

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:220.37V I:0.1130A P:13.745W PF:0.5519 Freq:50.00Hz Lamp Flux:1572.14x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 81mm	Shielding Angle:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.09	1.06	1.04	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	1.01	.96	.92	.99	.95	.91	.95	.92	.89	.92	.89	.87	.89	.87	.85	.83
3.0	.93	.87	.83	.91	.86	.82	.88	.84	.81	.86	.82	.79	.83	.80	.78	.76
4.0	.86	.80	.75	.85	.79	.74	.82	.77	.73	.80	.76	.72	.78	.74	.71	.70
5.0	.80	.73	.68	.79	.73	.68	.77	.71	.67	.75	.70	.67	.73	.69	.66	.64
6.0	.74	.67	.63	.73	.67	.62	.71	.66	.62	.70	.65	.61	.68	.64	.61	.59
7.0	.69	.62	.58	.68	.62	.58	.67	.61	.57	.66	.61	.57	.64	.60	.56	.55
8.0	.65	.58	.54	.64	.58	.53	.63	.57	.53	.61	.56	.53	.60	.56	.52	.51
9.0	.60	.54	.50	.60	.54	.50	.59	.53	.49	.58	.53	.49	.57	.52	.49	.47
10.0	.57	.51	.46	.56	.50	.46	.55	.50	.46	.55	.49	.46	.54	.49	.46	.44

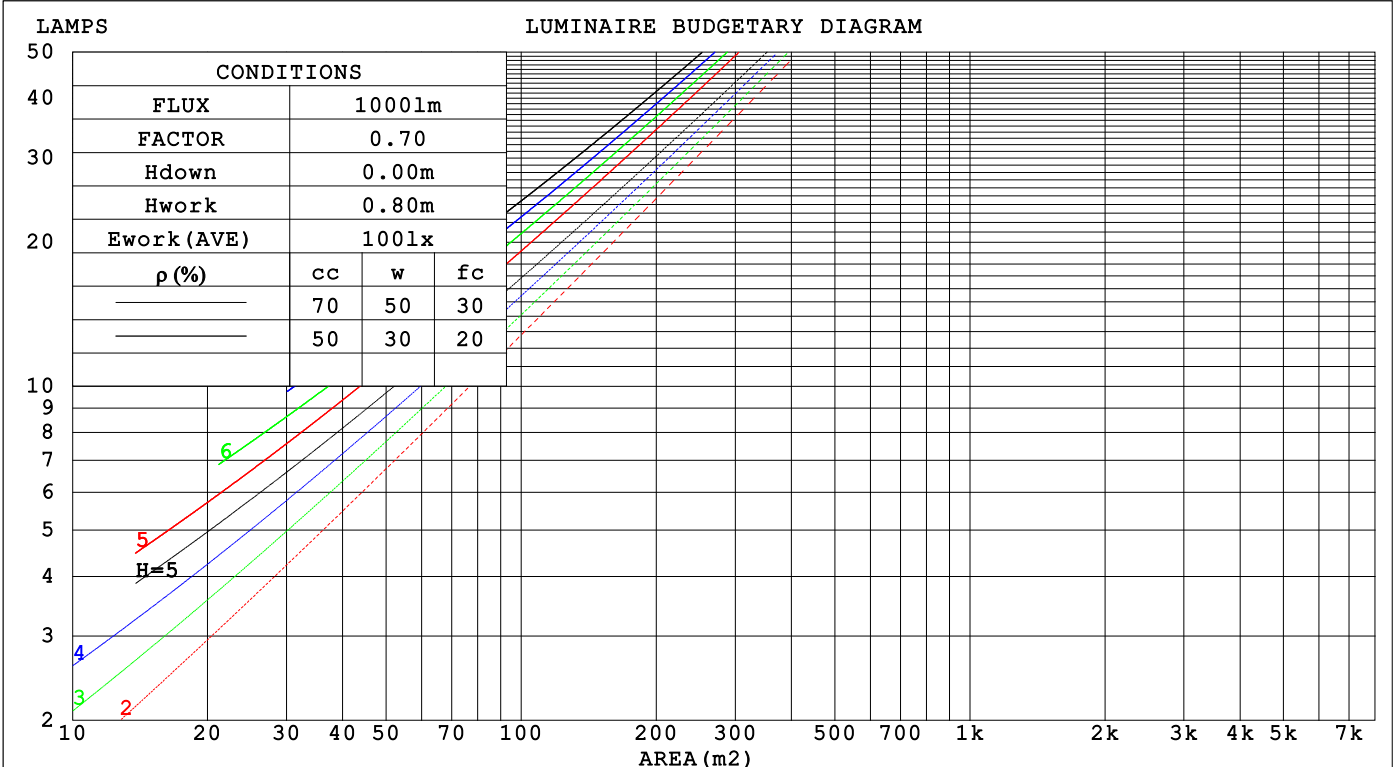

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-11-10

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:220.37V I:0.1130A P:13.745W PF:0.5519 Freq:50.00Hz Lamp Flux:1572.14x1 lm								
NAME: 射灯			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.: 81mm			Shielding Angle:		

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.201	.114	.036	.194	.111	.035	.181	.104	.033	.168	.097	.031	.157	.091	.029	
2.0	.192	.105	.032	.186	.103	.032	.175	.097	.030	.164	.092	.029	.155	.087	.028	
3.0	.182	.097	.029	.177	.095	.029	.167	.091	.028	.158	.087	.027	.150	.083	.026	
4.0	.173	.090	.026	.169	.088	.026	.160	.085	.025	.152	.082	.025	.145	.079	.024	
5.0	.164	.084	.024	.160	.082	.024	.153	.080	.023	.146	.077	.023	.139	.074	.022	
6.0	.156	.078	.022	.153	.077	.022	.146	.075	.022	.140	.073	.021	.134	.070	.021	
7.0	.149	.074	.021	.146	.073	.021	.140	.071	.020	.134	.069	.020	.129	.067	.020	
8.0	.142	.069	.019	.139	.068	.019	.134	.067	.019	.129	.065	.019	.124	.064	.019	
9.0	.135	.066	.018	.133	.065	.018	.128	.063	.018	.124	.062	.018	.119	.061	.017	
10.0	.130	.062	.017	.127	.061	.017	.123	.060	.017	.119	.059	.017	.115	.058	.017	

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.199	.199	.199	.170	.170	.170	.116	.116	.116	.067	.067	.067	.021	.021	.021	
1.0	.181	.165	.151	.155	.142	.130	.106	.098	.090	.061	.056	.052	.020	.018	.017	
2.0	.167	.141	.118	.143	.121	.102	.098	.084	.071	.057	.049	.042	.018	.016	.014	
3.0	.156	.122	.095	.134	.105	.082	.092	.073	.058	.053	.043	.034	.017	.014	.011	
4.0	.146	.108	.078	.126	.093	.068	.086	.065	.048	.050	.038	.028	.016	.012	.009	
5.0	.138	.096	.065	.119	.083	.057	.082	.058	.040	.047	.034	.024	.015	.011	.008	
6.0	.131	.087	.056	.113	.076	.049	.078	.053	.034	.045	.031	.020	.015	.010	.007	
7.0	.125	.080	.048	.107	.069	.042	.074	.049	.030	.043	.029	.018	.014	.009	.006	
8.0	.119	.074	.043	.103	.064	.037	.071	.045	.026	.041	.027	.016	.013	.009	.005	
9.0	.114	.069	.038	.098	.060	.033	.068	.042	.024	.040	.025	.014	.013	.008	.005	
10.0	.110	.064	.035	.094	.056	.030	.066	.039	.021	.038	.023	.013	.012	.008	.004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-11-10

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:220.37V I:0.1130A P:13.745W PF:0.5519 Freq:50.00Hz										
Lamp Flux:1572.14x1 lm										
NAME: 射灯			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.: 81mm				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.6	10.7	9.9	10.9	11.1	9.2	10.3	9.5	10.5	10.7
3H	9.8	10.8	10.1	11.0	11.2	9.3	10.3	9.6	10.5	10.8
4H	10.0	10.9	10.3	11.2	11.4	9.5	10.4	9.8	10.6	10.9
6H	10.2	11.0	10.5	11.3	11.6	9.6	10.5	9.9	10.7	11.0
8H	10.2	11.0	10.6	11.3	11.6	9.6	10.4	9.9	10.7	11.0
12H	10.2	11.0	10.6	11.3	11.6	9.5	10.3	9.9	10.6	10.9
4H 2H	9.5	10.4	9.8	10.6	10.9	9.0	9.9	9.3	10.2	10.4
3H	9.8	10.6	10.1	10.9	11.2	9.3	10.1	9.7	10.4	10.7
4H	10.1	10.8	10.5	11.2	11.5	9.6	10.3	10.0	10.6	11.0
6H	10.4	11.1	10.8	11.4	11.8	9.8	10.5	10.2	10.8	11.2
8H	10.5	11.1	10.9	11.5	11.9	9.8	10.4	10.2	10.7	11.1
12H	10.6	11.1	11.0	11.5	11.9	9.7	10.3	10.2	10.7	11.1
8H 4H	10.2	10.8	10.6	11.1	11.5	9.7	10.3	10.1	10.7	11.1
6H	10.6	11.1	11.0	11.5	11.9	10.0	10.5	10.4	10.9	11.3
8H	10.7	11.1	11.2	11.5	12.0	9.9	10.4	10.4	10.8	11.3
12H	10.8	11.1	11.3	11.6	12.1	9.9	10.2	10.4	10.7	11.2
12H 4H	10.2	10.7	10.6	11.1	11.5	9.7	10.2	10.1	10.6	11.0
6H	10.5	11.0	11.0	11.4	11.9	10.0	10.4	10.4	10.8	11.3
8H	10.7	11.0	11.1	11.5	12.0	9.9	10.3	10.4	10.7	11.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.2 / - 3.5					+ 2.2 / - 3.9				
1.5H	+ 4.4 / - 3.6					+ 4.4 / - 4.3				
2.0H	+ 4.8 / - 0.7					+ 4.9 / - 0.8				

CIE Pub.117, 1572 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.6)  
 Area: 0.127 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-11-10

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:220.37V I:0.1130A P:13.745W PF:0.5519 Freq:50.00Hz Lamp Flux:1572.14x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 81mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	81	74	70	81	74	69	80	73	69	65
0.80	89	83	78	89	82	78	87	81	78	73
1.00	95	88	84	94	88	84	92	88	83	79
1.25	99	93	89	98	93	89	96	91	88	83
1.50	103	97	93	101	96	93	99	95	91	86
2.00	106	101	97	104	100	97	101	98	95	89
2.50	108	104	100	106	102	99	103	100	97	91
3.00	110	106	103	108	104	102	104	102	99	92
4.00	112	109	106	110	107	105	106	104	102	94
5.00	114	111	109	111	109	107	107	105	104	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-11-10

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:220.37V I:0.1130A P:13.745W PF:0.5519 Freq:50.00Hz Lamp Flux:1572.14x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 81mm	Shielding Angle:

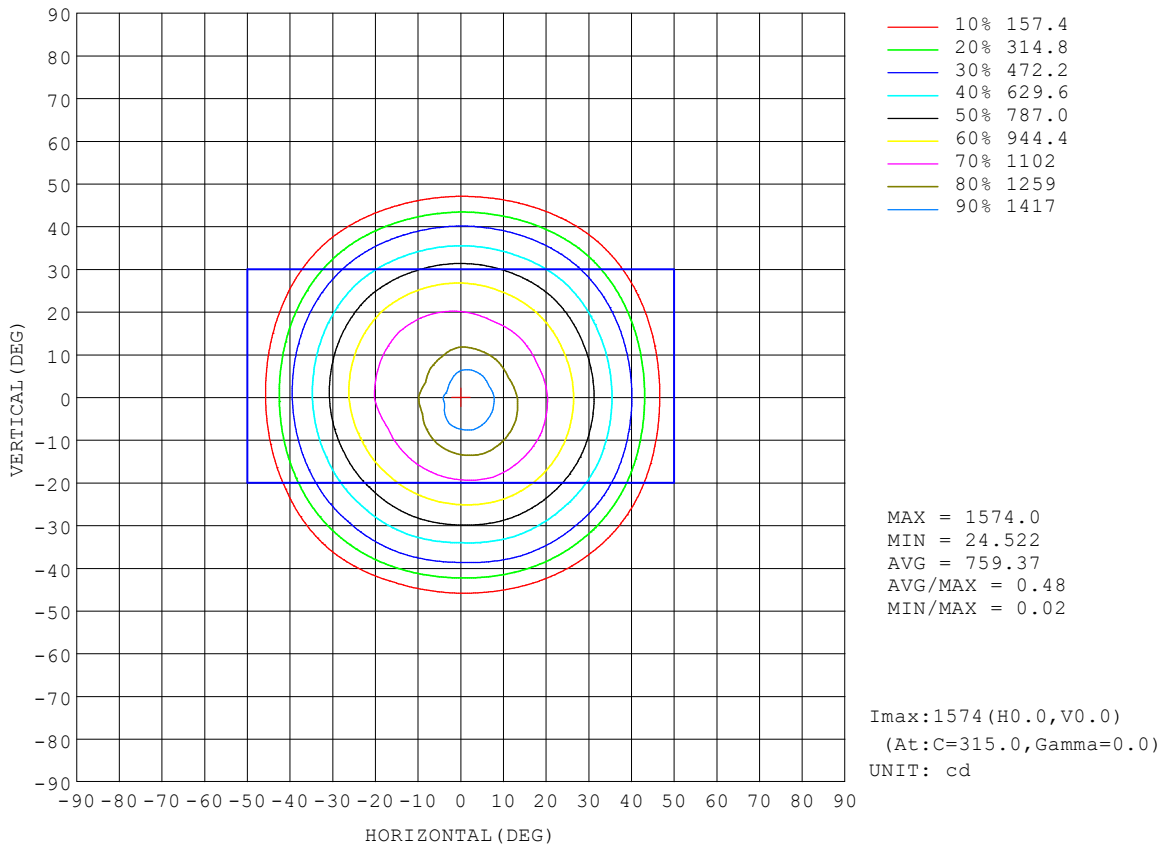


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-11-10

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:220.37V I:0.1130A P:13.745W PF:0.5519 Freq:50.00Hz Lamp Flux:1572.14x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 81mm	Shielding Angle:

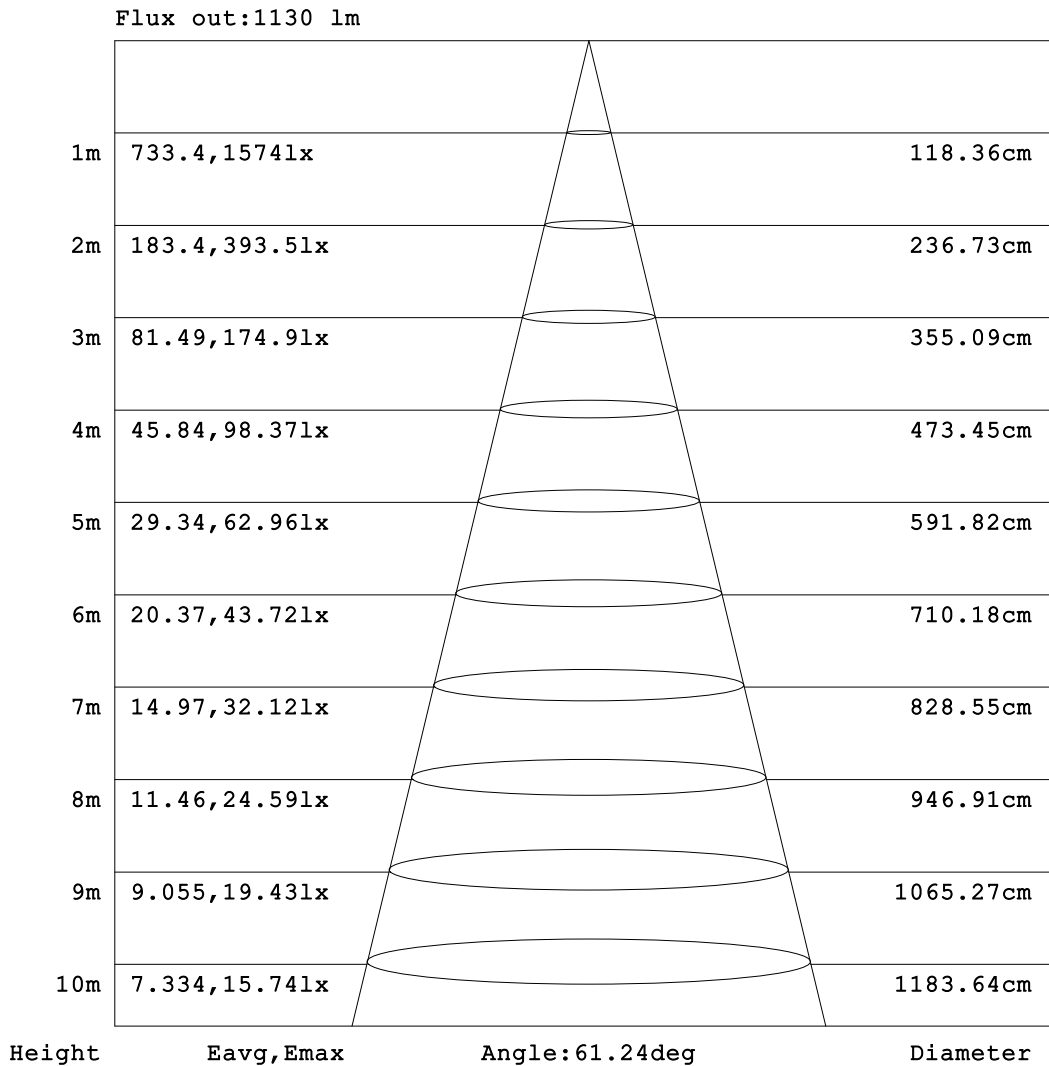


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-11-10

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.401m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:220.37V I:0.1130A P:13.745W PF:0.5519 Freq:50.00Hz Lamp Flux:1572.14x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 81mm	Shielding Angle:

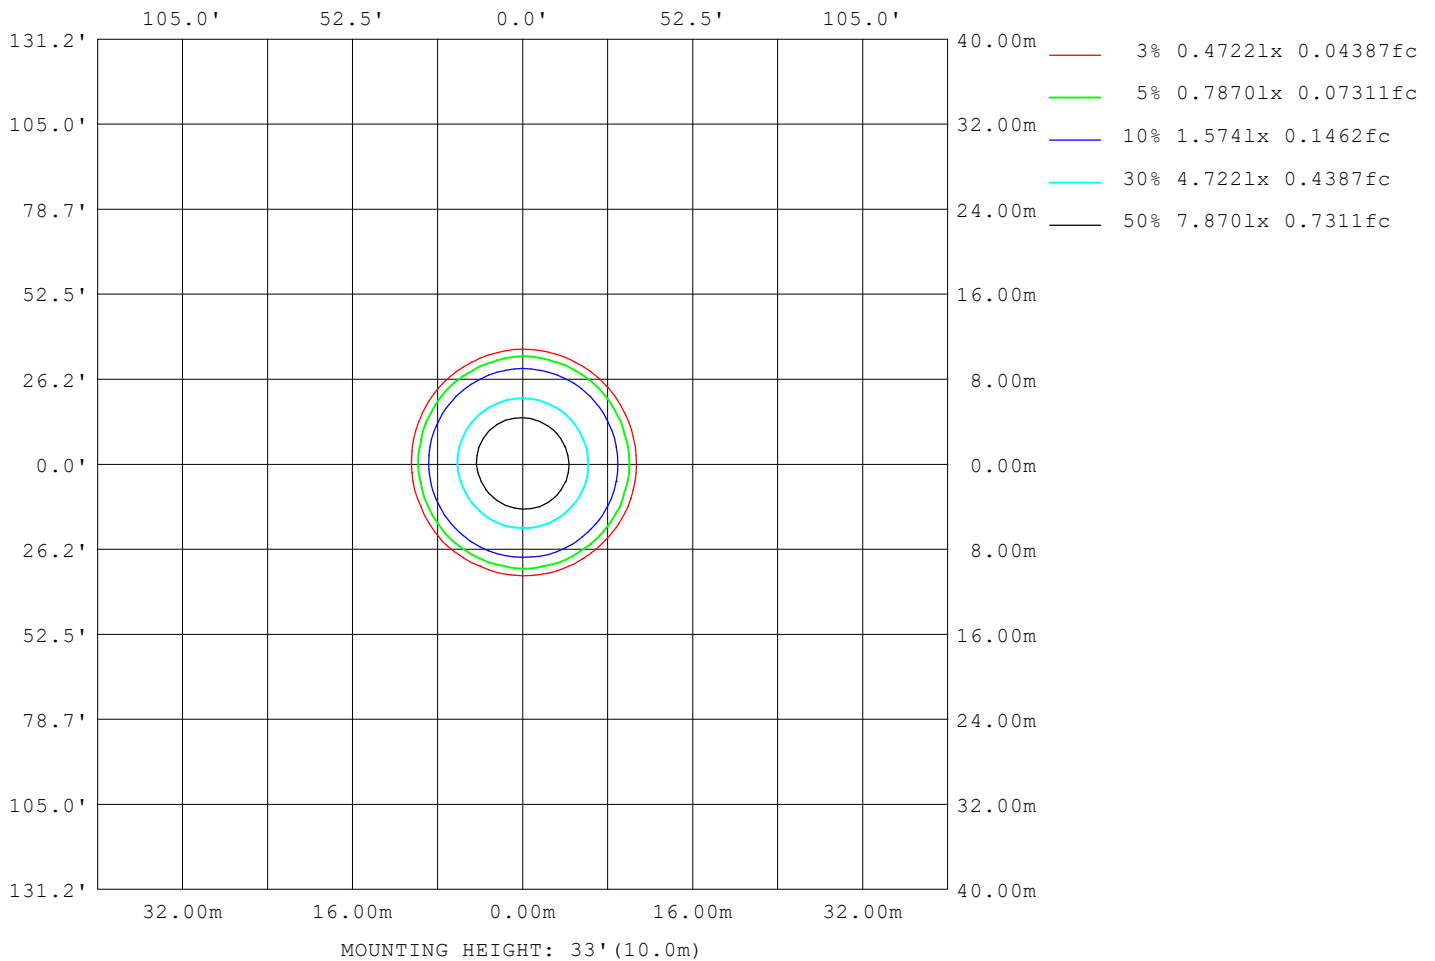

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:DAMIN  
Test Date:2023-11-10

γ Range: 0 - 180DEG  
γ Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
Humidity:65.0%  
Test Distance:9.401m [K=1.0000]  
Remarks:

**LED Avg.L Report**

Test:U:220.37V I:0.1130A P:13.745W PF:0.5519 Freq:50.00Hz Lamp Flux:1572.14x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 81mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	428
L_0~180 (75) av	577
L_0~180 (85) av	541
L_90~270 (65) av	432
L_90~270 (75) av	538
L_90~270 (85) av	47
L_45 (65) av	432
L_45 (75) av	571
L_45 (85) av	172

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-11-10

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

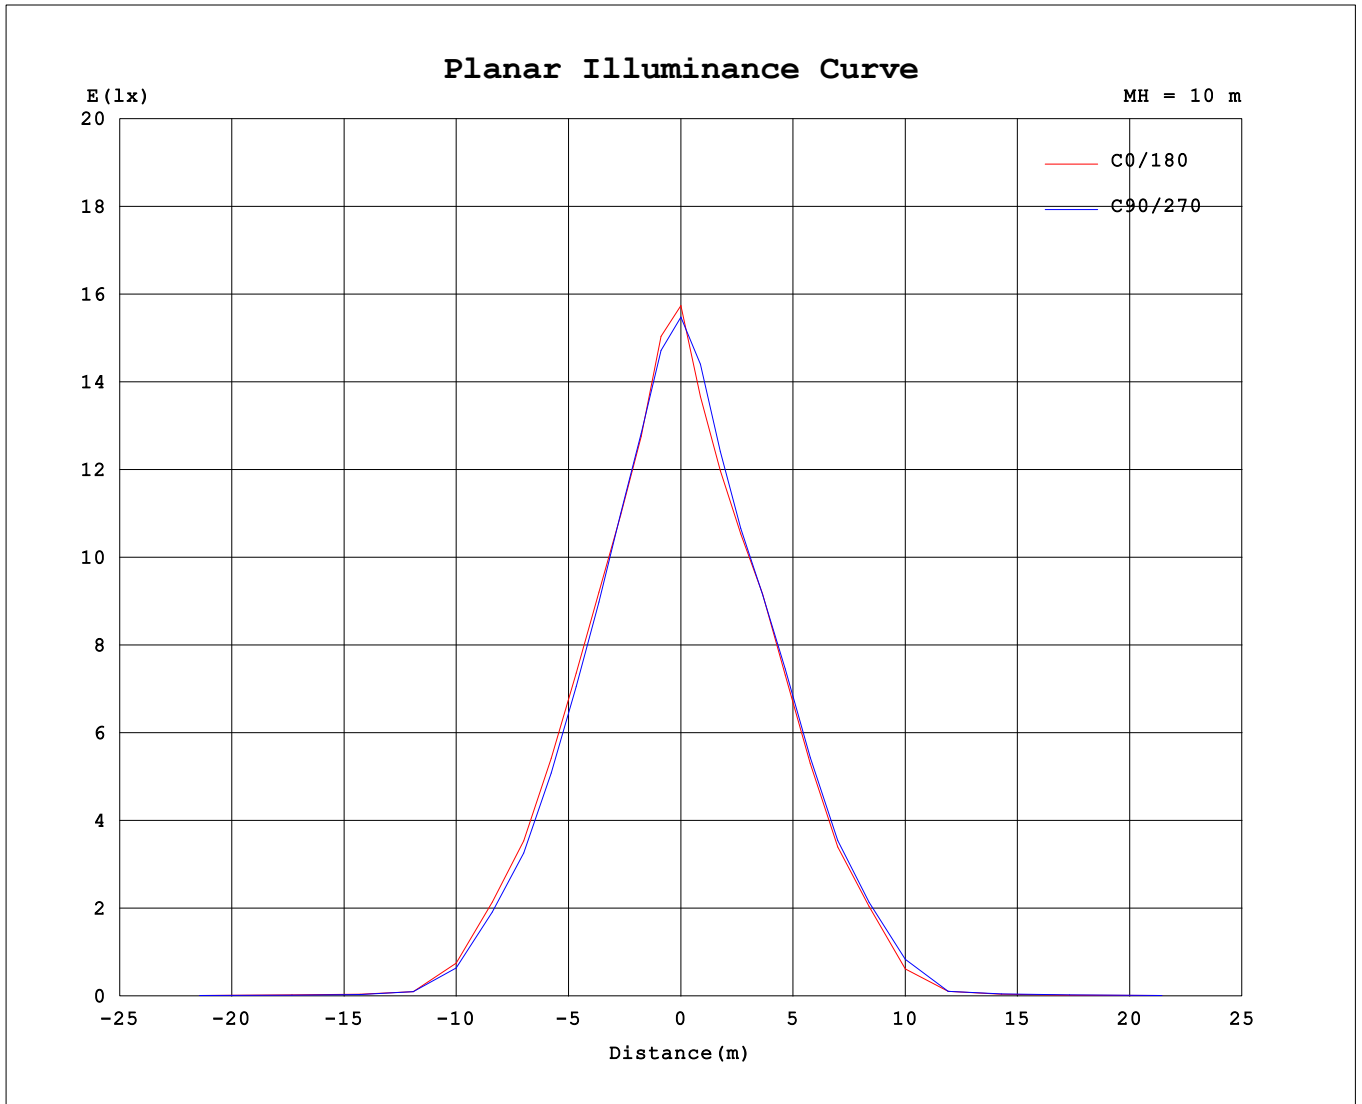

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-11-10

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.401m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.37V I:0.1130A P:13.745W PF:0.5519 Freq:50.00Hz Lamp Flux:1572.14x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 81mm	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552			
5	1500	1511	1509	1512	1493	1475	1436	1396	1363	1344	1374	1417	1461	1489	1508	1505			
10	1317	1343	1356	1365	1347	1331	1295	1260	1237	1226	1251	1269	1304	1315	1323	1317			
15	1200	1227	1236	1242	1225	1196	1168	1163	1153	1168	1187	1197	1186	1182	1193	1195			
20	1094	1109	1104	1107	1086	1078	1084	1086	1091	1107	1118	1118	1107	1096	1102	1099			
25	976	982	977	970	951	944	942	957	970	994	1008	1010	1005	993	992	989			
30	823	823	808	803	786	787	782	794	806	829	844	838	841	839	843	834			
35	636	637	615	618	595	602	592	601	611	629	643	642	648	646	656	645			
40	471	472	454	451	428	433	426	439	449	463	469	472	478	478	484	480			
45	211	209	190	189	183	172	178	168	174	189	211	221	238	237	239	225			
50	40.6	42.3	41.5	40.8	39.4	38.0	37.1	38.7	40.8	42.0	42.8	43.2	43.8	44.6	41.8	40.7			
55	26.1	25.9	24.0	22.5	22.2	21.9	22.1	23.0	24.4	25.0	26.4	27.1	27.6	29.0	27.6	27.1			
60	23.7	22.4	20.9	20.2	21.1	21.8	22.0	21.4	21.9	22.2	22.7	23.7	24.6	26.5	25.7	25.1			
65	23.8	21.8	20.6	20.8	22.0	23.6	24.2	22.7	22.2	21.8	22.1	23.2	24.3	26.1	25.8	25.4			
70	25.4	24.1	22.2	21.7	22.2	22.4	22.8	23.6	23.5	24.0	24.5	24.0	24.5	26.2	26.6	26.9			
75	20.1	20.3	18.7	17.4	16.5	16.5	17.2	18.1	17.9	18.5	18.9	18.2	18.9	20.4	20.3	21.3			
80	13.8	14.0	12.2	11.2	10.7	11.1	11.8	12.9	12.6	13.4	13.3	12.8	13.5	13.9	14.5	15.1			
85	6.31	4.50	0.48	0.22	0.30	0.21	0.34	3.82	5.65	3.91	3.27	0.54	0.75	0.59	3.53	4.54			
90	0.10	0.10	0.09	0.09	0.09	0.10	0.10	0.10	0.12	0.12	0.11	0.11	0.11	0.12	0.12	0.13			
95	0.09	0.14	0.08	0.14	0.10	0.15	0.10	0.15	0.20	0.13	0.19	0.14	0.18	0.15	0.17	0.12			
100	0.20	0.26	0.20	0.28	0.22	0.29	0.23	0.28	0.39	0.31	0.36	0.29	0.33	0.27	0.33	0.27			
105	0.42	0.49	0.44	0.51	0.47	0.53	0.47	0.51	0.68	0.60	0.64	0.56	0.60	0.53	0.59	0.55			
110	0.74	0.81	0.79	0.86	0.83	0.88	0.82	0.86	1.09	1.02	1.05	0.96	0.99	0.92	0.98	0.93			
115	1.17	1.27	1.25	1.32	1.30	1.35	1.29	1.32	1.62	1.54	1.56	1.48	1.50	1.43	1.48	1.45			
120	1.73	1.83	1.82	1.89	1.86	1.91	1.86	1.88	2.23	2.15	2.17	2.08	2.10	2.02	2.08	2.05			
125	2.36	2.46	2.45	2.53	2.51	2.54	2.49	2.52	2.92	2.83	2.85	2.76	2.78	2.70	2.73	2.71			
130	3.03	3.14	3.12	3.22	3.19	3.23	3.17	3.18	3.62	3.55	3.55	3.48	3.50	3.43	3.45	3.42			
135	3.71	3.81	3.80	3.90	3.88	3.91	3.85	3.86	4.34	4.27	4.26	4.17	4.21	4.14	4.18	4.15			
140	4.38	4.48	4.45	4.58	4.56	4.58	4.51	4.55	5.04	4.94	4.93	4.83	4.90	4.82	4.87	4.85			
145	5.04	5.12	5.09	5.18	5.20	5.20	5.13	5.17	5.65	5.53	5.52	5.41	5.50	5.42	5.51	5.48			
150	5.56	5.65	5.62	5.75	5.73	5.72	5.66	5.69	6.14	6.01	6.03	5.92	6.02	5.95	6.07	6.01			
155	6.01	6.10	6.05	6.20	6.20	6.18	6.09	6.12	6.53	6.37	6.40	6.33	6.47	6.40	6.49	6.41			
160	6.46	6.55	6.53	6.66	6.66	6.63	6.53	6.57	6.93	6.78	6.79	6.75	6.87	6.82	6.89	6.81			
165	7.00	7.12	7.05	7.25	7.23	7.21	7.07	7.10	7.41	7.26	7.26	7.24	7.37	7.33	7.36	7.30			
170	7.60	7.74	7.68	7.83	7.76	7.76	7.68	7.72	7.95	7.82	7.80	7.72	7.86	7.83	7.91	7.85			
175	8.19	8.34	8.30	8.40	8.25	8.31	8.29	8.27	8.40	8.30	8.35	8.22	8.27	8.29	8.44	8.33			
180	8.51	8.59	8.54	8.56	8.49	8.51	8.57	8.56	8.56	8.52	8.58	8.49	8.50	8.50	8.60	8.52			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:DAMIN  
 Test Date:2023-11-10

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks: