
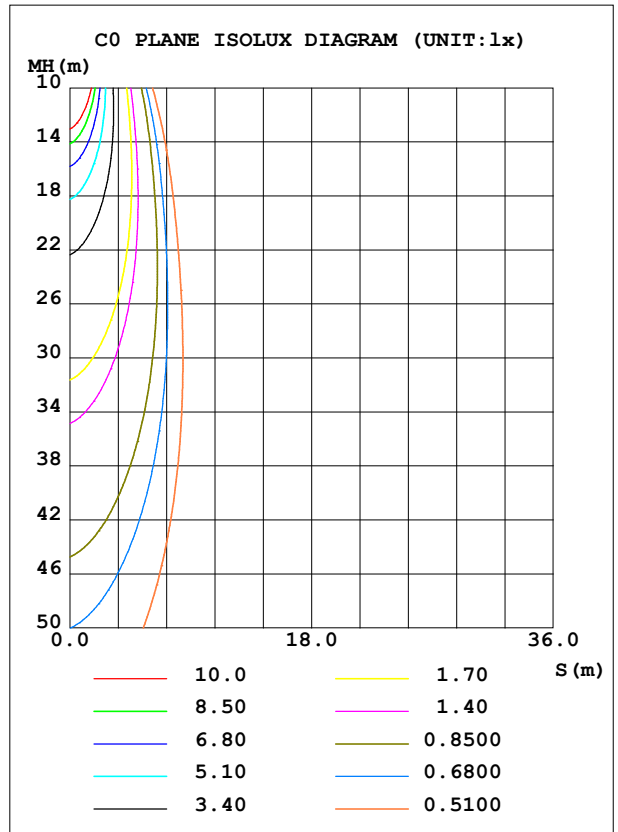


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.39V I:0.0604A P:7.3019W PF:0.5490 Freq:50.00Hz Lamp Flux:503.715x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 68.98 lm/W
MODEL	342AR	I _{max} (cd)	1691	S/MH (C0/180)	0.49	
NOMINAL POWER (W)	7	LOR (%)	100.0	S/MH (C90/270)	0.48	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	503.72	η UP, DN (C0-180)	0.0, 45.5	
NOMINAL FLUX (lm)	503.715	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 54.5	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	219.5	η down (%)	100.0	CIBSE SHR MAX	0.30	

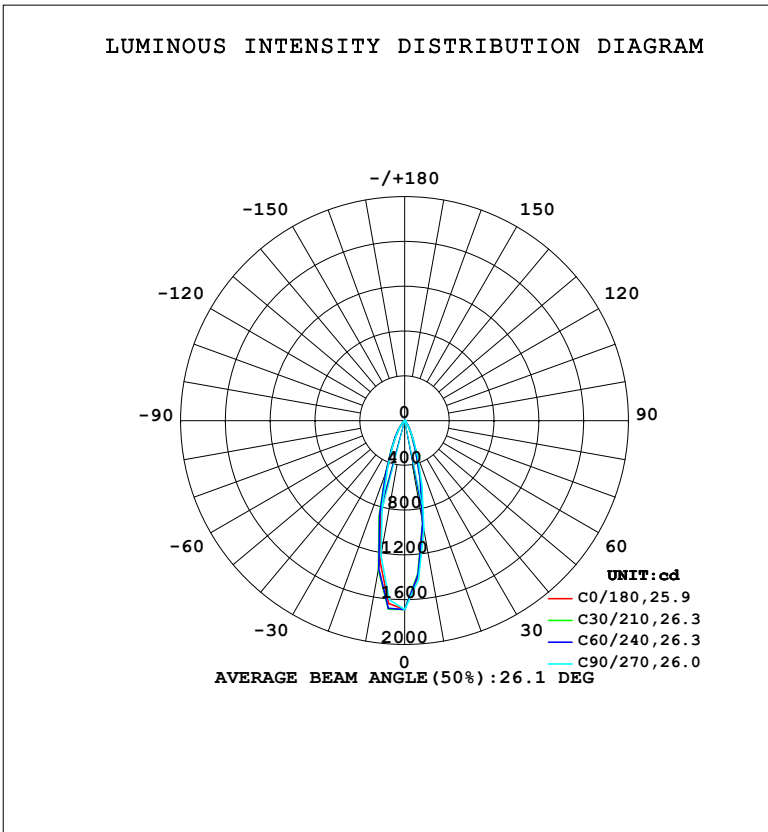

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-01-20

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	949.0	934.4	994.9	1161	1274	1357	1226	1043	0- 10	132.6	132.6	26.3,26.3
20	302.1	293.6	334.4	420.6	477.5	506.6	447.6	349.4	10- 20	196.8	329.4	65.4,65.4
30	98.11	91.86	106.4	141.2	166.0	168.2	152.9	115.6	20- 30	109.2	438.6	87.1,87.1
40	26.53	23.05	23.68	41.77	52.97	52.99	48.13	32.76	30- 40	48.83	487.4	96.8,96.8
50	3.987	3.433	3.206	6.369	9.383	9.112	8.230	5.260	40- 50	14.04	501.4	99.5,99.5
60	0.0845	0.0299	0.0667	0.1988	0.2557	0.5249	0.1504	0.1705	50- 60	2.211	503.6	100,100
70	0.0061	0	0.0001	0	0	0.0420	0.0060	0.0484	60- 70	0.0655	503.7	100,100
80	0	0	0	0	0	0.0180	0	0.0242	70- 80	0.0084	503.7	100,100
90	0	0	0	0	0	0	0	0	80- 90	0.0031	503.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 497.14 lm

%lum = 98.7%

%lamp = 98.7%

Conical surface Flux(130deg): 503.69 lm

%lum = 100.0%


%lamp = 100.0%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-20

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.39V I:0.0604A P:7.3019W PF:0.5490 Freq:50.00Hz Lamp Flux:503.715x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

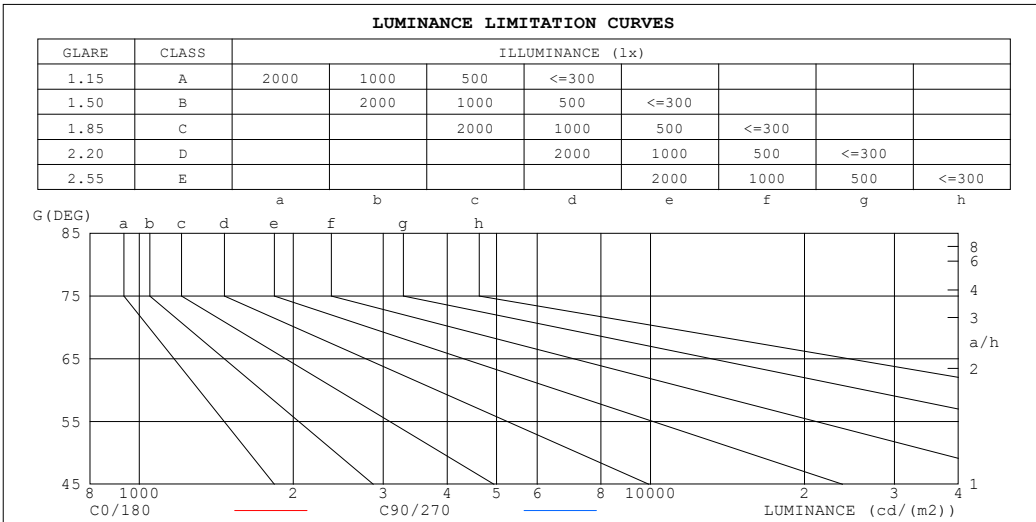

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	0	0
65	1	1
60	2	1
55	16	9
50	63	50
45	148	130


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-20

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.39V I:0.0604A P:7.3019W PF:0.5490 Freq:50.00Hz Lamp Flux:503.715x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
	ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96
2.0	1.06	1.03	1.00	1.04	1.01	.99	1.01	.99	.97	.98	.96	.95	.96	.94	.93	.91
3.0	1.01	.97	.93	.99	.96	.93	.97	.94	.91	.95	.92	.90	.92	.90	.89	.87
4.0	.96	.91	.88	.95	.91	.88	.93	.89	.87	.91	.88	.86	.89	.87	.85	.83
5.0	.92	.87	.83	.91	.86	.83	.89	.85	.82	.87	.84	.82	.86	.83	.81	.80
6.0	.88	.83	.79	.87	.82	.79	.85	.82	.79	.84	.81	.78	.83	.80	.78	.76
7.0	.84	.79	.76	.83	.79	.76	.82	.78	.75	.81	.78	.75	.80	.77	.75	.73
8.0	.81	.76	.73	.80	.76	.73	.79	.75	.72	.78	.75	.72	.77	.74	.72	.71
9.0	.78	.73	.70	.77	.73	.70	.76	.72	.70	.76	.72	.69	.75	.72	.69	.68
10.0	.75	.70	.67	.75	.70	.67	.74	.70	.67	.73	.69	.67	.72	.69	.67	.66

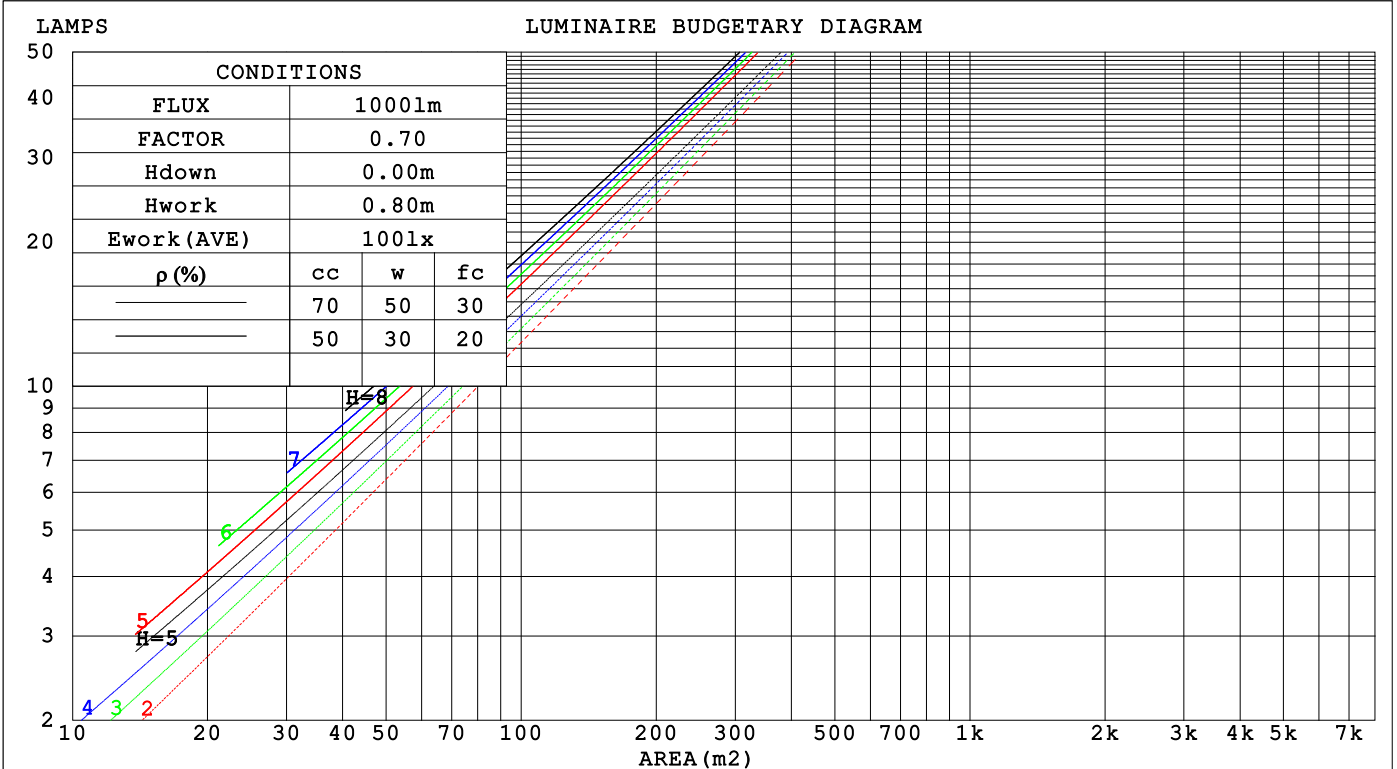

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-20

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.39V I:0.0604A P:7.3019W PF:0.5490 Freq:50.00Hz								
Lamp Flux:503.715x1 lm								
NAME:			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.:			Shielding Angle:		

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.150	.085	.027	.143	.082	.026	.131	.075	.024	.120	.069	.022	.109	.063	.020	
2.0	.141	.077	.024	.136	.075	.023	.125	.070	.022	.116	.065	.020	.107	.061	.019	
3.0	.133	.071	.021	.128	.069	.021	.120	.065	.020	.112	.061	.019	.104	.058	.018	
4.0	.126	.065	.019	.122	.064	.019	.114	.061	.018	.108	.058	.017	.101	.055	.017	
5.0	.119	.061	.018	.116	.059	.017	.109	.057	.017	.104	.055	.016	.098	.052	.016	
6.0	.113	.057	.016	.110	.056	.016	.105	.054	.016	.100	.052	.015	.095	.050	.015	
7.0	.108	.053	.015	.106	.053	.015	.101	.051	.015	.096	.049	.014	.092	.048	.014	
8.0	.103	.050	.014	.101	.050	.014	.097	.048	.014	.093	.047	.014	.089	.046	.013	
9.0	.099	.048	.013	.097	.047	.013	.093	.046	.013	.090	.045	.013	.086	.044	.013	
10.0	.095	.046	.013	.093	.045	.013	.090	.044	.012	.087	.043	.012	.083	.042	.012	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.152	.133	.116	.130	.114	.100	.089	.079	.070	.051	.046	.041	.017	.015	.013	
3.0	.138	.113	.094	.118	.098	.081	.081	.068	.057	.047	.040	.034	.015	.013	.011	
4.0	.126	.098	.077	.108	.085	.067	.075	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.117	.086	.064	.100	.075	.055	.069	.052	.039	.040	.031	.023	.013	.010	.008	
6.0	.108	.076	.054	.093	.066	.047	.064	.046	.033	.037	.027	.020	.012	.009	.006	
7.0	.101	.068	.046	.087	.059	.040	.060	.042	.028	.035	.025	.017	.011	.008	.006	
8.0	.095	.062	.039	.082	.054	.034	.057	.038	.024	.033	.022	.014	.011	.007	.005	
9.0	.090	.056	.034	.077	.049	.030	.053	.034	.021	.031	.020	.013	.010	.007	.004	
10.0	.085	.052	.030	.073	.045	.026	.051	.032	.019	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-20

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.39V I:0.0604A P:7.3019W PF:0.5490 Freq:50.00Hz										
Lamp Flux:503.715x1 lm										
NAME:			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.:				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-0.3	0.4	-0.1	0.6	0.7	-0.2	0.5	-0.0	0.7	0.8
3H	-0.5	0.2	-0.2	0.4	0.6	-0.4	0.3	-0.1	0.5	0.7
4H	-0.6	0.1	-0.3	0.3	0.5	-0.5	0.2	-0.2	0.4	0.6
6H	-0.6	-0.0	-0.4	0.2	0.4	-0.6	0.1	-0.3	0.3	0.5
8H	-0.7	-0.1	-0.4	0.2	0.4	-0.6	-0.0	-0.3	0.2	0.5
12H	-0.7	-0.2	-0.4	0.1	0.4	-0.6	-0.1	-0.3	0.2	0.5
4H 2H	-0.6	0.1	-0.3	0.3	0.5	-0.5	0.2	-0.2	0.4	0.6
3H	-0.7	-0.2	-0.4	0.1	0.4	-0.6	-0.1	-0.3	0.2	0.5
4H	-0.8	-0.3	-0.5	-0.0	0.3	-0.7	-0.2	-0.4	0.1	0.4
6H	-0.9	-0.5	-0.6	-0.1	0.2	-0.8	-0.4	-0.5	-0.1	0.3
8H	-1.0	-0.6	-0.6	-0.2	0.2	-0.9	-0.5	-0.5	-0.1	0.2
12H	-1.0	-0.6	-0.6	-0.3	0.1	-1.0	-0.6	-0.5	-0.2	0.2
8H 4H	-1.0	-0.6	-0.6	-0.2	0.2	-0.9	-0.5	-0.5	-0.1	0.2
6H	-1.1	-0.7	-0.7	-0.3	0.1	-1.0	-0.7	-0.6	-0.3	0.2
8H	-1.2	-0.8	-0.7	-0.4	0.0	-1.1	-0.7	-0.6	-0.3	0.1
12H	-1.2	-0.9	-0.7	-0.5	-0.0	-1.1	-0.9	-0.7	-0.4	0.1
12H 4H	-1.0	-0.6	-0.6	-0.3	0.1	-1.0	-0.6	-0.5	-0.2	0.2
6H	-1.2	-0.8	-0.7	-0.4	0.0	-1.1	-0.7	-0.6	-0.3	0.1
8H	-1.2	-0.9	-0.7	-0.5	-0.0	-1.1	-0.9	-0.7	-0.4	0.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.7 / -33.3					+ 3.4 / -36.3				
1.5H	+ 6.0 / -26.2					+ 5.8 / -25.9				
2.0H	+ 8.8 / -44.4					+ 9.0 / -41.7				

CIE Pub.117, 503.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.4)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-20

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.39V I:0.0604A P:7.3019W PF:0.5490 Freq:50.00Hz Lamp Flux:503.715x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	83	80	88	83	80	76
0.80	97	91	88	96	91	88	95	90	87	84
1.00	101	96	92	100	95	92	98	95	91	88
1.25	105	100	97	104	99	96	102	98	95	91
1.50	107	103	100	106	102	99	104	100	98	94
2.00	109	106	103	108	105	102	105	103	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	109	107	106	99
5.00	115	113	112	113	112	110	109	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-20

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.39V I:0.0604A P:7.3019W PF:0.5490 Freq:50.00Hz Lamp Flux:503.715x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

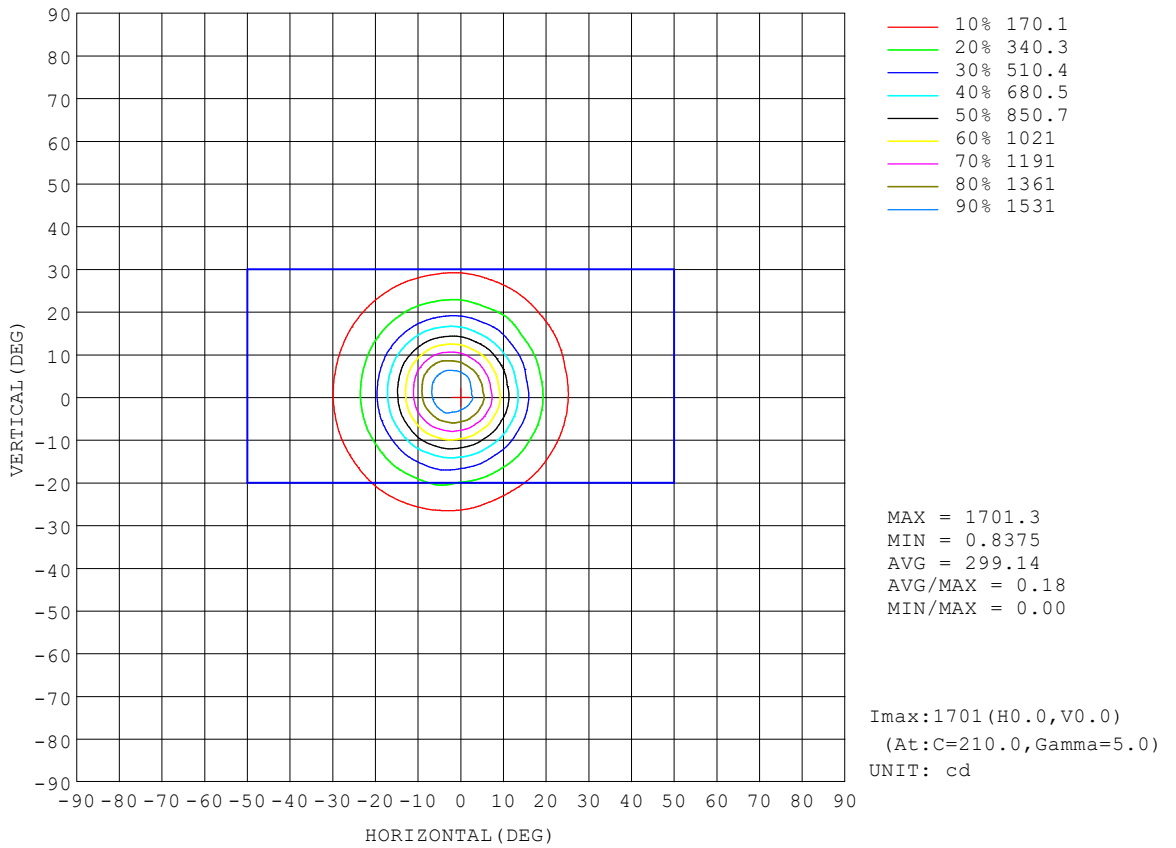


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-20

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.39V I:0.0604A P:7.3019W PF:0.5490 Freq:50.00Hz Lamp Flux:503.715x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

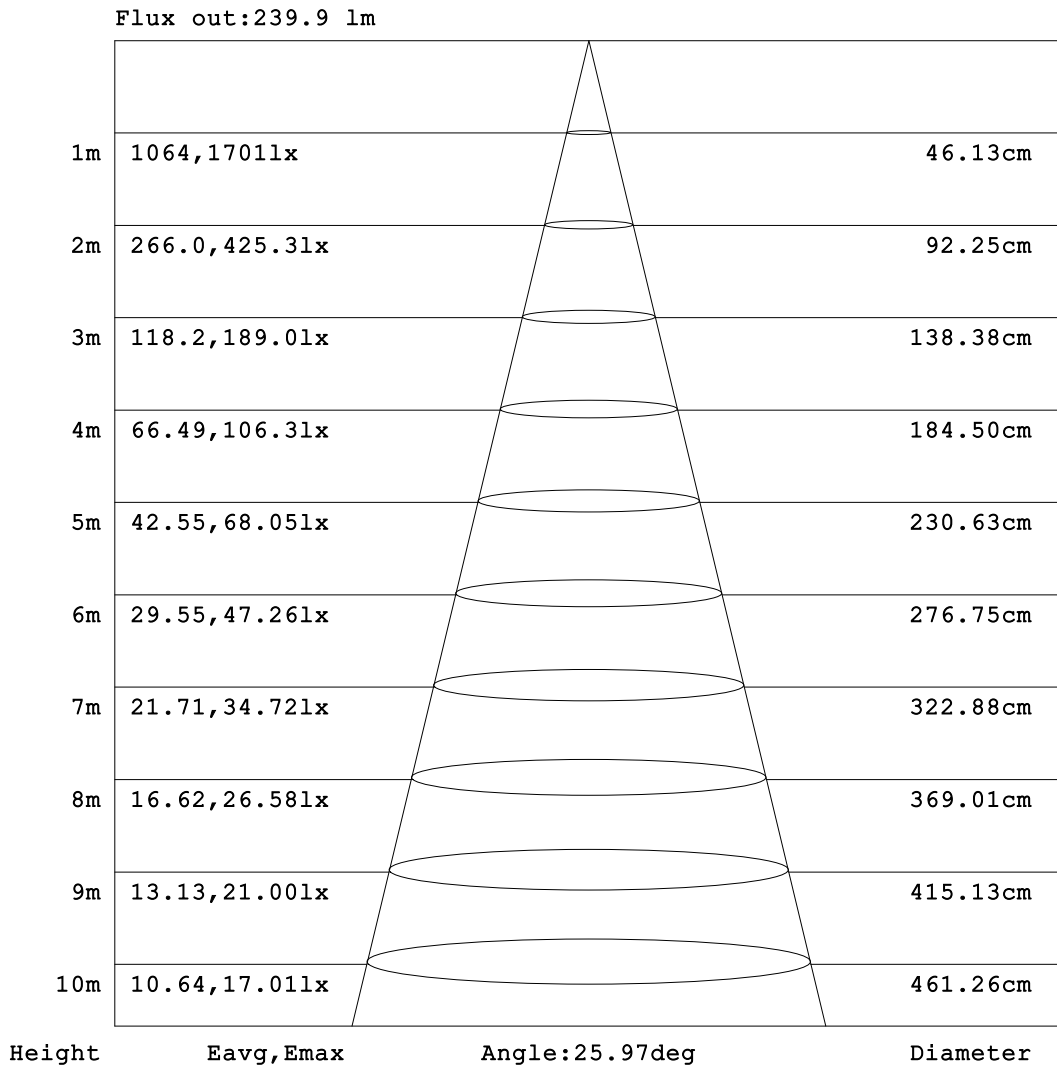


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-20

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.39V I:0.0604A P:7.3019W PF:0.5490 Freq:50.00Hz Lamp Flux:503.715x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

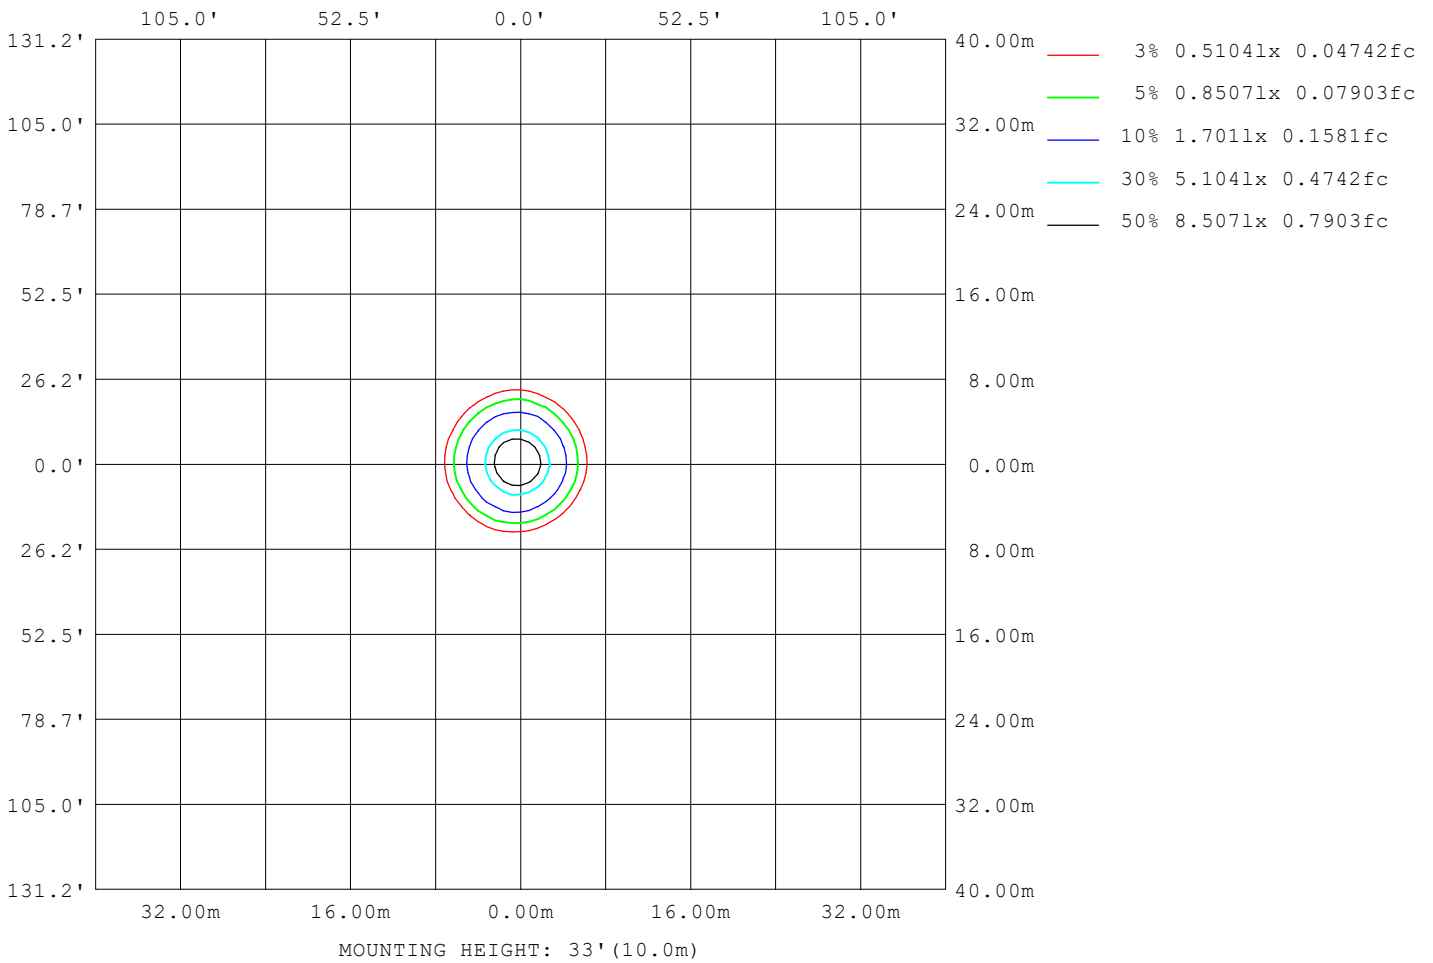

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2024-01-20

γ Range: 0 - 90DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.39V I:0.0604A P:7.3019W PF:0.5490 Freq:50.00Hz Lamp Flux:503.715x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	0
L_0~180 (75) av	0
L_0~180 (85) av	0
L_90~270 (65) av	1
L_90~270 (75) av	0
L_90~270 (85) av	0
L_45 (65) av	1
L_45 (75) av	1
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-20

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

Planar Illuminance Curve

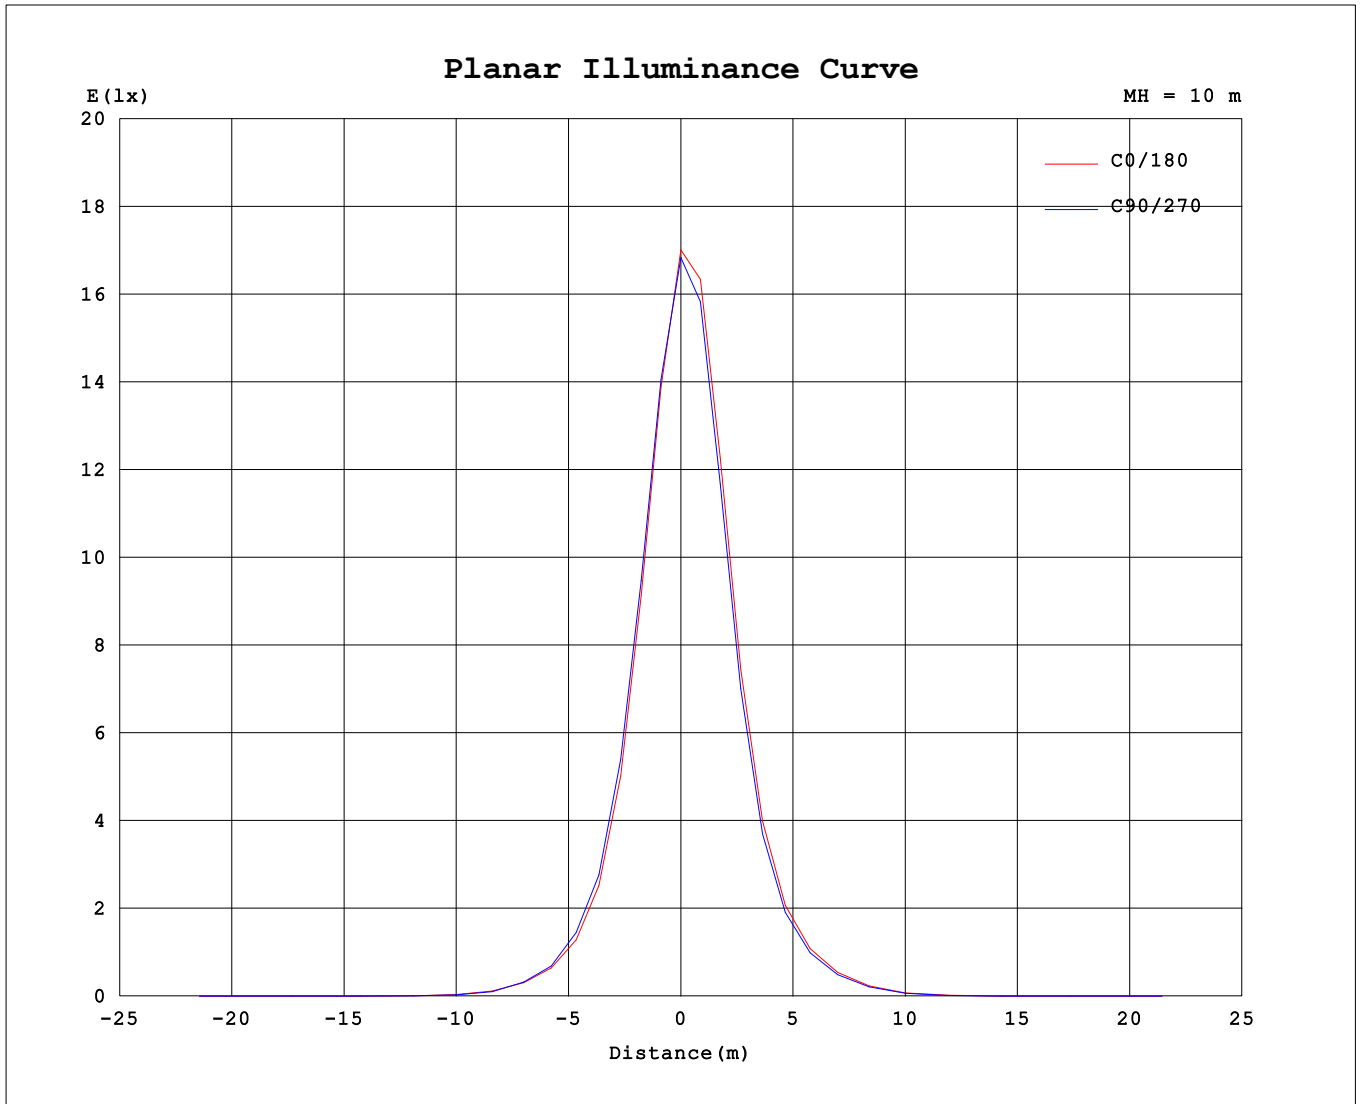

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-01-20

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.39V I:0.0604A P:7.3019W PF:0.5490 Freq:50.00Hz Lamp Flux:503.715x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1688	1688	1688	1688	1688	1688	1688	1688	1688	1688	1688	1688	1688	1688	1688	1688	1688	1688	1688
5	1394	1385	1372	1379	1382	1406	1426	1467	1499	1549	1582	1628	1641	1663	1691	1689	1681	1640	1605
10	949	940	925	934	938	968	995	1049	1093	1161	1204	1262	1274	1306	1357	1357	1342	1275	1226
15	553	545	534	542	546	574	601	649	684	736	760	806	821	849	884	878	870	822	780
20	302	296	288	294	296	316	334	384	392	421	436	465	478	493	510	507	499	469	448
25	172	167	161	164	166	176	196	208	224	241	250	269	277	282	289	286	282	266	258
30	98.1	94.7	91.0	91.9	93.3	99.7	106	119	129	141	148	161	166	168	170	168	166	158	153
35	56.6	54.1	51.0	51.2	51.7	55.2	59.7	67.4	73.9	81.1	85.4	93.3	97.7	98.2	99.0	96.5	95.8	92.5	89.5
40	26.5	24.8	22.9	23.0	23.0	22.8	23.7	27.7	35.9	41.8	45.4	50.5	53.0	53.7	55.0	53.0	52.6	49.7	48.1
45	10.4	10.1	9.34	9.02	8.89	8.81	9.22	10.6	13.6	16.1	17.7	19.8	21.7	22.8	22.9	21.7	21.7	20.5	19.8
50	3.99	3.97	3.57	3.43	3.14	3.29	3.21	4.00	5.01	6.37	7.34	8.60	9.38	9.98	9.84	9.11	9.21	8.84	8.23
55	0.93	1.00	0.93	0.81	0.73	0.64	0.51	0.78	1.30	2.10	2.47	2.86	3.17	3.63	3.68	3.05	3.09	2.82	2.37
60	0.08	0.02	0.08	0.03	0.09	0.01	0.07	0.02	0.13	0.20	0.36	0.33	0.26	0.52	0.57	0.52	0.40	0.23	0.15
65	0.03	0.00	0.02	0.00	0.03	0.00	0.03	0.00	0.03	0.00	0.03	0.00	0.00	0.05	0.00	0.07	0.02	0.10	0.03
70	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.04	0.01	0.07	0.01
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00	0.05	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.04	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.03	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-20

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

